



FLAT-LOCK TILES

Profile Technique for Roofing and Facades



For up-to-date information, technical reports, advanced technical information, parts lists, standard details or specifications please visit our website.

Exclusion of Liability

RHEINZINK GmbH & Co. KG takes account of state-of-the-art technology, product development and research at all times in its technical opinions. Such comments or recommendations are based on installation as is possible in standard cases in a European climate, specifically the indoor climate prevailing in Europe. We are of course unable to cater for all conceivable circumstances, which may call for restrictions and/or further measures in individual cases. This means that on no account are such comments provided by RHEINZINK GmbH & Co. KG any substitute for the advice or planning offered by an architect/consultant or contractor in charge of a specific building project under consideration of the specific circumstances prevailing on site.

Usage of documentation made available by RHEINZINK GmbH & Co. KG constitutes a service for which no liability can be assumed for losses or further claims of whatever nature. This does not affect liability arising in the case of intent, gross negligence or injury to life, limb or human health. Claims to compensation governed by the German Product Liability Act shall be likewise by unaffected thereby.

13th edition

© 2017 RHEINZINK GmbH & Co. KG

All rights reserved. No part of this book may be reproduced in any form without written permission of RHEINZINK GmbH & Co. KG.

Foreword

This document describes the use of RHEINZINK-Flat-Lock Tiles. Although it forms the basis for proper planning and classical application solutions, it is no more than a guide for users. The detailed drawings included here describe solutions which are feasible at a practical level.

We should like to explicitly point out that in actual practice it may not be possible to create the type of cladding illustrated in this document – or not to their full extent. In this context every situation should be examined in detail by the planner in charge. It is necessary here to take account of the system-specific effects on the property and local/climatic conditions as well as the requirements in terms of building physics. Compliance with the application techniques and specifications described here does not release users from any responsibility in this regard.

This document is based on our practical experience and represents the latest findings from research and development, recognised standards and state-of-the-art technology. We reserve the right to make changes at any time in the course of further development.

If you have any queries or suggestions, please contact your customer advisor or get in touch with your local RHEINZINK sales office. All contact data can be found on our homepage **www.rheinzink.com/contact**.

For an overview of our sales offices see page 58 of this document.

Datteln, November 2017

The RHEINZINK Product Lines	6	1.7	Storage and Transportation	11	2.	PROFILE GEOMETRY	Page
1. MATERIAL RHEINZINK TITANIUM ZINC		1.8	Structural Physics	12	2.1	RHEINZINK-Flat-Lock Tile	14
		1.9	Windproof Building Envelopes	12	2.1.1	Profile Geometry	14
1.1 Alloy and Quality	8				2.1.2	Installation Direction/ Installation Instructions	14
1.2 Marking	8	1.10	Weather Protection	12	2.1.3	Fixing	15
1.3 Material Properties	8	1.11	Moisture	12	2.1.4	Shapes and Seam Offset	16
1.4 Patina Formation	9	1.12	Thermal Economy	13	2.1.5	Temperature-induced Change in Length	17
1.4.1 RHEINZINK-CLASSIC bright rolled	9	1.12.1	Thermal Insulation	13	2.2	RHEINZINK-Crystal Tile	18
1.4.2 RHEINZINK-prePATINA blue-grey and graphite-grey	9	1.12.2	Summer thermal Insulation	13	2.2.1	Profile Geometry	18
1.4.3 Information about Processing	9	1.12.3	Thermal Bridges	13	2.2.2	Fixing	18
1.4.4 Surface Uniformity	9	1.13	Fire Protection	13	2.2.3	Detailed Solutions	19
1.4.5 Protection during Transportation and Installation	10	1.14	Rear-ventilation	13	2.2.4	Installation Instructions	19
1.4.6 Information on Wave Formation	10	1.14.1	Air intake and exhaust Openings	13	2.3	Substructures	20
1.5 Response to external Influences	10	1.15	Soundproofing	13	2.4	Installation Sequences	21
1.5.1 Influence of other Metals placed on Top	10	1.16	Other applicable Standards and Guidelines	13	2.5	Detail Design	22
1.5.2 Influence of other Building Materials placed on Top	10				2.6	Details	23
1.5.3 Influence of other Substances incl. Mortar	10				2.6.1	General Instructions	23
1.5.4 Effect of Oil Heating	11				2.6.2	Pictogram	23
1.5.5 Base and Splash Water Areas, Rock Salt	11				2.7	Planning Grid	24
1.6 General Processing Principles	11				2.8	Facade Design Examples of Applications	26
1.6.1 Marking	11				2.9	Flat-Lock Tile Design, Facade	28
1.6.2 Forming/Radii of Curvature	11				2.10	Application with Roofing	47
1.6.3 Length Change caused by Temperature	11				2.11	Roof Structure	48
					2.12	Example of Application Flat-Lock Tile, Roofing Application	49
					2.13	Roofing Design with Flat-Lock Tiles	50
					Contact		58
					Reference Projects		60
					Illustrations		64

PRODUCT LINES



ONE BRAND – 3 PRODUCT LINES

**A perfect solution
for every requirement**

To give you even more design freedom, we offer our material in three different product lines and in numerous finishes. You get the perfect solution for every requirement with the trusted RHEINZINK quality. All products exceed the high standards of EN 988 and the TÜV QUALITY ZINC criteria. The high level of manufacture is guaranteed by constant inspections and extensive laboratory tests. On this double page, we have summarised the characteristic features of our three product lines. On request, we will gladly send you samples of material.

RHEINZINK-CLASSIC

**The natural material
in its most original form**

RHEINZINK-CLASSIC is the most original of all material options. The bright rolled version has proven itself for over 50 years of application. Depending on the weather conditions, over time a typical blue-grey patina is formed on the naturally shiny metallic surface. The patina gradually becomes more and more distinctive and develops a unique surface character.

Surface quality:

RHEINZINK-CLASSIC® bright rolled

RHEINZINK-artCOLOR

**Unlimited design in a variety of
colours**

RHEINZINK-artCOLOR is the coloured version for roofing and facade cladding. A durable coating allows a wide range of colours and opens up a variety of design options for architects, planners, builders and trade customers. Classically elegant, contemporary avant-garde, contrasting or tone-on-tone. If you have a special colour requirement, we will be happy to produce RHEINZINK-artCOLOR in the shade of your choice.

Surface qualities:

RHEINZINK-artCOLOR® anthracite
RHEINZINK-artCOLOR® pure-white
RHEINZINK-artCOLOR® pearl-gold
RHEINZINK-artCOLOR® moss-green
RHEINZINK-artCOLOR® nut-brown
RHEINZINK-artCOLOR® blue
RHEINZINK-artCOLOR® tile-red

prePATINA



prePATINA

THE WORLD'S ONLY NATURALLY PRE-WEATHERED SURFACES

Only RHEINZINK has a special process in which the blue-grey or graphite-grey colour of the natural patina is achieved naturally in production. As the inventors, we called this unique pickling process "pre-weathering". Virtually imperceptible to the human eye, atmospheric influences over time create a natural protective patina that reliably protects the product. In production, any use of artificial coatings, varnishes or phosphating is avoided completely. The prePATINA line products are the only ready-made natural surfaces in the entire global zinc construction market.

Natural weathering compensates for any installation-related scratches. Only the RHEINZINK-prePATINA and the RHEINZINK-CLASSIC lines offer this self-healing effect. They are environmentally friendly and absolutely maintenance-free.

100% SELF-HEALING
100% MAINTENANCE-FREE
Only available from RHEINZINK

Surface qualities:

RHEINZINK-prePATINA® blue-grey
RHEINZINK-prePATINA® graphite-grey

MATERIAL

1. Material RHEINZINK Titanium Zinc

1.1 Alloy and Quality

RHEINZINK is titanium zinc according to DIN EN 988. The RHEINZINK alloy consists of electrolytically refined zinc according to DIN EN 1179 with a purity grade of 99.995% and precisely determined proportions of copper and titanium.

All RHEINZINK products are certified according to DIN EN ISO 9001:2008 and are subject to a voluntary inspection by TÜV Rheinland according to the strict QUALITY ZINC criteria catalogue (please request free of charge).

Ecological Relevance

RHEINZINK is a natural, 100% recyclable material that has always complied fully with today's strict ecological requirements. The latest production facilities, sophisticated logistics and favourable processing properties are available. Environmentally-conscious action is documented through the introduction of the environmental management system ISO 14001:2004. It is checked and certified according to TÜV Rheinland. We also document responsible action in regard to the environment through the introduction of an energy management system according to ISO 50001:2011. It is our intention to save as much energy as possible, to save resources and to keep the environmental impact of our products as low as possible.

Aspects of ecological Assessment

According to the holistic assessment from the Institute for Construction and Environment e.V., RHEINZINK is declared an environmentally friendly construction product according to ISO 14025, type

III (EPD) and EN 18504 „Sustainability of construction works. Environmental product declarations“. The examination of the environmental and health compatibility criteria also includes the entire life cycle of RHEINZINK products, from the raw material extraction to processing and use to recycling and disposal. It is based on a life cycle assessment according to ISO 14040 (LCA) (please request the certificate free of charge).

Electromagnetic Radiation is safely shielded

There is much public controversial debate about electromagnetic radiation. The International Society for Electrosmog Research (IGEF e.V.) has provided information here on RHEINZINK's shielding properties. The result: Over 99% of electromagnetic smog present is shielded. Biological measurements on people confirm the technical measurements and show a harmonising effect on heart, circulation and the nervous system. Body relaxation increases.

Remaining Values

With a service life that spans several generations, RHEINZINK is a material that sets new standards. The 30-year guarantee highlights the durability of the 100% recyclable material. This offers additional protection.

1.2 Marking

RHEINZINK sheets and coils:

Recognisable by the consecutive coloured stamping on the metal underside.

RHEINZINK-

Roof Drainage Products:

Recognisable by the brand embossing.

RHEINZINK-

Roof Drainage Accessories:

Recognisable by the brand embossing.

RHEINZINK-Palette Identification:

Recognisable by the packaging label with detailed product data.

1.3 Material Properties

- Density (spec. weight)
7.2 g/cm³
- Melting point approx. 420 °C
- Expansion coefficient:
in a longitudinal rolling direction:
2.2 mm/m x 100 K
in a transverse rolling direction:
1.7 mm/m x 100 K
- Typical joining techniques:
seaming, soft soldering, bonding, screwing, riveting
- Non-magnetic
- Non-combustable
- Electromagnetic radiation shielding
- Recyclability 100 %
- High recycling rate
- Assured material cycle
- Environmentally compatible (EPD)
- Natural material
- Low energy use
- Long service life
- Vital trace element
- Extensive resources

Metal thickness (mm)	Weight (kg/m ²)
0.70	5.04
0.80	5.76
1.00	7.20

RHEINZINK weight according to Metal thickness in kg/m² (Numbers are rounded)



A



B



C



D

1.4 Patina Formation

On the natural RHEINZINK-prePATINA surface forms a bonded natural patina in the atmosphere. In so doing all the environmental influences from the air and rain water are integrated into the surface development. The material surface is maintenance free and as a natural product does not require care or cleaning. When using the natural RHEINZINK-prePATINA line surfaces in areas subject to a marine climate, white deposits may develop on the surface due to the salt in the atmosphere. These natural deposits integrate into the natural patina and because of the colour contrast, are more visible on the darker, RHEINZINK-prePATINA graphite-grey surface. This will not affect the function or expected service life of the material when used on facades, roofs or other cladded building components. The natural patina will appear lighter when used in locations where the air contains chlorides. When used in environments where sulphur levels are higher, (e.g. industrial pollution), the patina may appear somewhat darker than usual.

1.4.1 RHEINZINK-CLASSIC bright rolled

Application for all sheet metal work in seaming and soldering techniques. Natural patina forms at different times depending on the application or roof pitch. In areas protected from rain water e.g. beneath eaves or on roof edges sometimes only after a few years.

1.4.2 RHEINZINK-prePATINA blue-grey and graphite-grey

The pre-weathering process was developed by RHEINZINK 25 years ago especially for use in areas where a "finished" picture of the RHEINZINK surface is desired even at the hand-over of keys. This process allows the production of colour of a natural patina although the natural patina itself only forms after installation.

RHEINZINK is the only manufacturer world wide who uses this unique pre-weathering process. The use of a pickling process compared to a coating or phosphating process has two distinct advantages: Pickling gives the surface the appearance of a genuine patina, something that only occurs otherwise after a long time through natural influences. Pickling produces an even colour tone but is not comparable however with a RAL shade. A protective coating applied to the surface achieves temporary protection for storage, transport and processing. This protective film makes oil-free forming possible for processing in the profile roll forming machines.

The RHEINZINK quality prePATINA graphite-grey is the dark alternative and may, after a few years during the formation of patina and depending on the regional climate, develop a slight dark green sheen as with slate.

During the pickling process other natural surface properties are preserved - the surface remains solderable. The visible "Ageing with dignity" is not prevented by pre-weathering and has proved its worth in practice over many decades. The material largely reduces the typical reflections of the surface of thin sheets (oil canning).

1.4.3 Information about Processing

In order to avoid surface reactions from excessive sweating from the skin and other impurities caused by the building site, oil-free clean textile gloves should be worn.

Suitable products can be found at www.rheinzink.de/werbemittelshop



1.4.4 Surface Uniformity

We make every effort to supply profiles with surface uniformity. Production-related slight differences can occur, which are purely of appearance in nature and which, in the prePATINA line, usually even out during the formation of patina. In order to exclude specific product-related visual imperfections, particular requirements should be requested with respect to surface uniformity.



Qualitäts-
merkmale
www.tuv.com
ID: 0000040891



* environmental label for building products recognized by the German Federal Environmental Agency

MATERIAL

1.4.5 Protection during Transportation and Installation

To protect the surface during the transport, storage and installation our façade profiles and also our surface quality art-COLOR line are delivered with a protective plastic film. It also protects against negative influences during the construction phase.

The foliation is a self-adhesive protective plastic film that is applied at the factory and is exposed during installation to UV radiation and temperature variations. If this exposure continues for a long time, the properties of the film may change and cause adhesive residues on the metal surface. To avoid these changes, we recommend removing the film immediately after the installation process. The film should be removed at once from the surface as moisture could be held back at loose film edges. This could cause visual imperfections (formation of zinc hydroxide).

1.4.6 Information on Wave Formation Strip Material

A characteristic surface phenomenon with strip material is the typical slight wavy structure of thin sheet metal.

These waves form because of the reaction of a natural material to the winding and unwinding process in the factory and the corresponding reworking (profiling etc.) during workshop preparation and installation.

The surface finish CLASSIC bright rolled emphasises the changing appearance because of light reflection. With increasing patination this perception reduces. If from the start e.g. for facades and roof surfaces, a high grade appearance is desired, we recommend, the surface finishes prePATINA blue-grey or prePATINA graphite-grey.

Sheet Material

An improved evenness is obtained by using sheet material, which RHEINZINK can manufacture and supply at lengths up to 6 m. The measurement of corrugations is subject to strict controls and must not exceed the value defined under DIN EN 988 (max. 2 mm per metre). The RHEINZINKworks standard prescribes for each metre of sheet length e. g. max. 1 wave 1 mm in height.

1.5 Response to external Influences

1.5.1 Influence of other Metals placed on Top

Unproblematic:

- Aluminium, shiny or coated
- Lead
- Stainless steel
- Galvanised steel (rust streaking possible, e. g. caused by unprotected cut edges)

Problematic:

- Copper

1.5.2 Influence of other Building Materials placed on Top

Problematic:

- Unprotected bitumen roof sheeting without grit layer/gravel fill (acid oxidation)
- PVC roof sheeting (hydrochloric acid emissions)

1.5.3 Influence of other substances incl. Mortar

- Mineral-based materials such as chalk, cement or plaster plus moisture have a corrosive effect on metals.
- A suitable separating layer must be fitted between RHEINZINK building profiles and these building materials.
- Installation sequence: Plasterwork prior to RHEINZINK (if possible use material with plastic film)

1.5.4 Effect of Oil Heating

Discolouration on RHEINZINK surfaces can occur in the case of oil-driven heating systems because of the ingredients of the heating oil and additives. Such discolouration is more or less visible on all covering materials and has no influence on the durability of the roofing.

Note:

The builder must be informed about this situation. With gas-operated plants, discolouration is not expected.

1.5.5 Base and Splash Water Areas, Rock Salt

At base areas splash water can cause staining and disturb the patination process. Rock salt in connection with moisture has a corrosive effect on metals. Therefore facade claddings should be installed with a sufficient space to the ground, not less than 30 cm as a rule.

1.6 General Processing Principles


1.6.1 Marking

Mark using soft pens and not sharp pointed objects (scribing tool, pocket knife).

1.6.2 Forming/Radii of Curvature

Zinc and its alloys are anisotropic, which means they have different properties parallel and crosswise to the rolling direction.

The mechanical effect of this anisotropism is reduced to such a degree with RHEINZINK through the alloy and rolling process, that RHEINZINK independent of the rolling direction can be folded at 180° without incipient cracking.



Material thickness	Radius of curvature R_i minimum
1.00 mm	1.75 mm
1.20 mm	2.10 mm
1.50 mm	2.63 mm


Recommended radii of curvature (inner radius) for RHEINZINK

1.6.3 Length Change caused by Temperature

With coverings, roofs, and facade cladding (panel length), sheet metal work and roof drainage (profile length), changes in length caused by temperature (expansion and contraction) must be taken into account in the design. In particular for penetrations, corners, joints and other transitions, the right design measures must be implemented; e.g. panels or profiles must be installed stress-free from the expansion technology perspective.

1.7 Storage and Transportation

RHEINZINK products must always be stored and transported in dry and ventilated conditions.

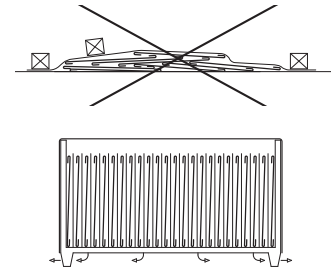

Storage and Transportation (Schema)

Note:

Container storage is the best method for optimum storage at the building site. If necessary request a dry and well-ventilated room from the building management. Do not place covers directly over the material as this can cause moisture or rain water to penetrate between the profiles and in the absence of ventilation lead to deterioration in appearance because of the formation of zinc hydroxide.

MATERIAL

1.8 Structural Physics

- Weather protection
- Moisture regulation
- Thermal economy
- Rear ventilation
- Sound proofing/fire protection

The rear-ventilated facade is a multi-layered system, which, when designed properly, guarantees permanent functional capability. By functional capability, we mean that all requirements pertaining to structural physics are met. This is described in detail below.

By separating the rain screen facade from the thermal insulation and supporting structure, the building is protected from the weather.

The supporting outer walls and the insulation remain dry and thus fully functional. Even when driving rain penetrates open joints, it is quickly dried out as a result of the air circulation in the ventilation space. The bracket-mounted rear-ventilated facade protects the components from severe temperature influence. Heat loss in the winter and too much heat gain in the summer are prevented.

Thermal bridges can be reduced considerably.

In the case of rounded parapets and dormer girders, the substructure and thermal insulation should be protected from penetrating moisture with a suitable layer.

1.9 Windproof Building Envelope

This does not apply to the rear-ventilated facade, as this component itself cannot be windproof.

The building must be windproof before the rear-ventilated facade is installed. A solid brick or concrete wall will ensure that the building is windproof. Penetrations (e.g. windows, ventilation pipes, etc.) must be sealed from the building component to the supporting structure. In the case of a skeleton construction, the wall surface must also be sealed.

If the building envelope is improperly sealed (wind suction, wind pressure), there is a high degree of ventilation/energy loss, which, along with drafts, creates unpleasant room temperature. Dew or condensation can be expected on the leeward side of the building.

Air circulation in the room should be provided through air conditioning or by opening the windows.

1.10 Weather Protection

Rear-ventilated facade cladding protects the supporting structure, the water-proofed thermal facade insulation, and the substructure, from the weather.

Bracket-mounted rear-ventilated facades provide a high degree of protection from driving rain.

Because of the physical structure, it is impossible for the rain or capillary water transfer to reach the insulating layers. Furthermore, moisture can always be drawn out through the ventilation space. This allows the insulating layers to dry out quickly, without impeding thermal insulation.

1.11 Moisture

Rear-ventilated facade cladding provides protection from driving rain and moisture. Moisture penetration as a result of diffusion does not occur in the rear-ventilated facade.

When the supporting structure is windproof, the diffusion current density is too small to cause the dew point temperature to drop.

1.12 Thermal Economy

In order to understand the thermal economy of the rear-ventilated facade, we must first consider the various heat flow rates, as well as the air exchange between the rear-ventilation space and the outside air, separately, in terms of structural physics..

1.12.1 Thermal Insulation

In the winter, heat flow from the inside to the outside is referred to as a heat transfer co-efficient (U-value).

The smaller the value, the smaller the quantity of heat escaping to the outside. The U-value is determined by the heat conductivity of the thermal insulation and insulation thickness.

The high-grade thermal insulation is a contribution to environmental protection and pays for itself in a relatively short period of time through low heating costs

1.12.2 Summer thermal Insulation

Summer thermal insulation should provide comfort: The amount of heat flowing from the outside to the inside should remain as small as possible. Proper thermal insulation, as well as a certain mass in the construction itself, will help to achieve this objective.

The advantage of a bracket-mounted, rear-ventilated facade, is that a large portion of the heat which streams onto the cladding is diverted through convective air exchange.

1.12.3 Thermal Bridges

Thermal bridges are elements of the building envelope, that have high thermal conductivity (have high U-values) and are continuous from the warm side to the cold side of the thermal insulation. Apart from general design-dependent thermal bridges of a building, e.g. protruding balconies, the installation of the substructure must be taken into account in the case of a rear-ventilated facade. Thermal bridges can be reduced significantly by installing an insulating strip between the supporting structure and the substructure (thermal break). Proper installation of the insulation reduces the formation of thermal bridges.

1.13 Fire Protection

Metal facades with a metal substructure and appropriate fasteners meet the highest requirements for non-combustibility (Building Material Class A1, DIN 4102). In the case of bracket-mounted, rear-ventilated facades, it may be necessary to install firestops.

1.14 Rear-ventilation

The free ventilation cavity between the facade cladding and the layer behind it must be at least 20 mm. Building tolerances and the slant of a building must be taken into account. In some places, this rear-ventilation space may be reduced locally up to 5 mm – e.g. by means of the substructure or the unevenness of the walls.

1.14.1 Air intake and exhaust Openings

The rear-ventilation space requires air intake and exhaust openings. These openings must be designed so that their functionality is guaranteed for the lifetime of the building. Their functionality may not be hindered through dirt or other external influences. The openings are located at the lowest and highest point of the facade cladding, as well as in windowsill and window lintel areas, and penetrations. In the case of higher, multi-storey buildings, additional air intake and exhaust openings should be provided (e.g. at each floor).

1.15 Soundproofing

To prove that a facade design is sound-proof, the entire wall structure, as well as each building component (windows, etc.) must be defined. The use of proper static fasteners will prevent any potential noise development as a result of the cladding.

1.16 Other applicable Standards and Guidelines

All trades must adhere to applicable DIN EN-/DIN-standards.

Guidelines for the design of metal roofs/ outer wall cladding and sheet metal work. Government regulations, building codes.

PROFILE GEOMETRY

2.1 RHEINZINK-Flat-Lock Tile

Using the RHEINZINK-Flat-Lock Tile, the designer has almost endless options in structuring the design of his building. The flat-lock tile can be installed vertically, horizontally and diagonally. Even complex building shapes with convex and concave designs can be realized.

2.1.1 Profile Geometry

Material thickness

$s = 0.70 \text{ mm}/0.80 \text{ mm}/1.00 \text{ mm}$

Face width = cover width

Cover width $\leq 600 \text{ mm}$

Cover length $\leq 3000 \text{ mm}$

(optimal $\leq 2000 \text{ mm}$)*

We are happy to advise you on other dimensions.

* Due to the better handling, we recommend an cover length of $\leq 2000 \text{ mm}$

All sizes in between can be produced.


Standard sizes in mm	Weight 1.00 mm
333 x 600 mm	~ 9.90 kg/m ²
400 x 800 mm	~ 8.54 kg/m ²
500 x 1000 mm	~ 8.90 kg/m ²
600 x 1200 mm	~ 8.62 kg/m ²

Application for outside Areas

- Facades
- Soffits
- Parapets
- Roofs

Application for inside Areas

- Walls
- Ceilings



Systemschnitt



View with system profile




View of flat-lock tile
Roof application




View of flat-lock tile
Facade application

2.1.2 Installation Direction/ Installation Instructions

- Installation direction from bottom to top
 - from right to left
 - from left to right
- Installation with cross-joint or offset possible
- With the roof tile, the fold-forward or fold-back must be slightly bent up and processed to allow for the plug-in due to the closed upper corner.
- Fixing with tested RHEINZINK-clips or clip strips, see item 2.1.3.
- The film over the visible surface is to be removed immediately after installation.

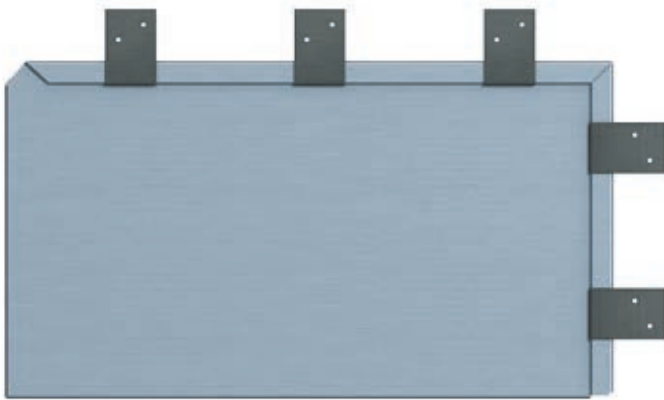

Example 1: Clip installation with short clips,
face dimension/bay width: 333 x 600 mm

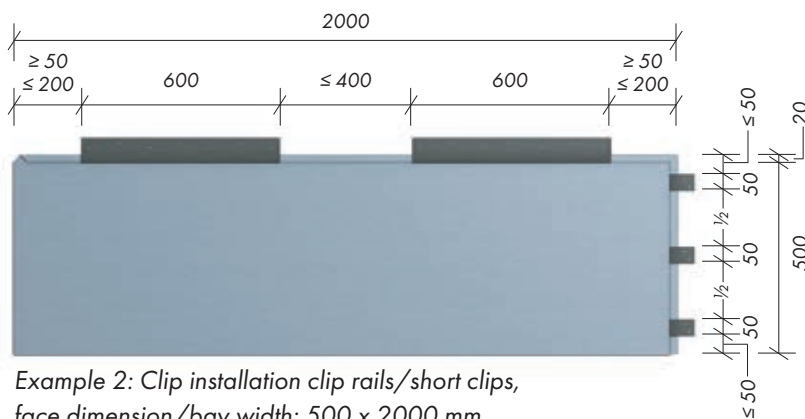

Example 2: Clip installation clip rails/short clips,
face dimension/bay width: 500 x 2000 mm



Short clip 50 x 75 mm



Clip rail 600 x 75 mm

2.1.3 Fixing

The stability of RHEINZINK-Flat Lock Tiles has been proven using wind suction tests according to the test criteria of ETAG 006. As a result from the tests, RHEINZINK has developed special clips and clip rails. These fixing elements consist of a special alloy and are factory pre-punched (hole diameter = 5 mm) in order to ensure the correct positioning of the fixing means. Roughened, hot-dip galvanized roofing nails 2.8 x 25 mm were used for the wind suction tests.

The maximum possible cover width of the flat-lock tiles and the required metal thickness are determined by the wind load on the building. The selection/arrangement of the short clips (50 mm wide) and/or clip rails (600 mm wide) takes place adapted to the tile size and the wind load.

Cover width x cover length	333 x 600						400 x 800						500 x 1000					
Area, m ²	0.20						0.32						0.50					
Metal thickness, mm	0.70		0.80		1.00		0.70		0.80		1.00		0.70		0.80		1.00	
Fixing clip	SC	-	SC	-	SC	-	SC	CR	SC	CR	SC	CR	SC	CR	SC	CR	SC	CR
Number of clips/spacing in mm	3/225	-	3/225	-	3/225	-	4/216.7	1	4/216.7	1	5/163	1	6/170	1	6/170	1	6/170	1
perm. w _d in kN/m ²	-4.18	-	-4.50	-	-4.50	-	-2.01	-4.59	-3.00	-4.59	-4.69	-4.59	-0.82	-2.94	-1.23	-2.94	-2.40	-2.94

Cover width x cover length	500 x 3000						600 x 1500				600 x 2000			
Area, m ²	1.50						0.90				1.20			
Metal thickness, mm	0.70		0.80		1.00		0.80		1.00		0.80		1.00	
Fixing clip	SC	CR	SC	CR	SC	CR	SC	CR	SC	CR	SC	CR	SC	CR
Number of clips/spacing in mm	17/178.1	4	17/178.1	4	17/178.1	4	10/150	2	10/150	2	14/264.3	3	14/264.3	3
perm. w _d in kN/m ²	-0.82	-3.92	-1.23	-3.92	-1.23	-3.92	-0.59	-3.27	-1.16	-3.27	-0.59	-3.68	-1.16	-3.68

SC: Short clip
CR: Clip rail

The tables show the number of clips required for the long side of the tile.

A factor of safety of 1.5 has been allowed for. The short side of each tile requires 2 or 3 additional clips.

From a cover width of 500 mm 3 clips are required. Installation according to example 2.

INSTALLATION VARIANTS


2.1.4 Shapes and Seam Offset

The design possibilities are virtually endless. It is up to the designer whether to use 1/2 staggered, a "random structure" or a 1/3 or 1/4 staggered.

Another variation is the formation of a cross-joint. The cross-joint is a visually calmer design.

The random structure is borrowed from nature. It is an extremely vibrant design visually, which integrates the adaptor tiles discreetly into the overall design. Because of the flexibility of the diverse baywidths, it is ideally suited for the grid system in renovations.


A diagonally staggered installation has a dynamic, vibrant and exciting energy. In addition to rectangular and square formats, tiles in parallelogram form are also possible in the facade, which is another design possibility of this versatile installation system.

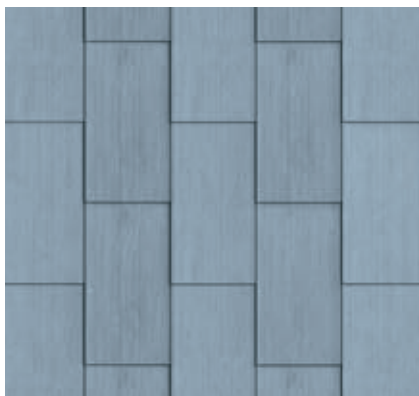

1/2 staggered




1/3 staggered

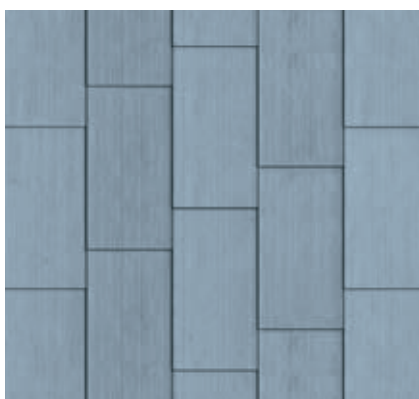


1/4 staggered




Cross-joint

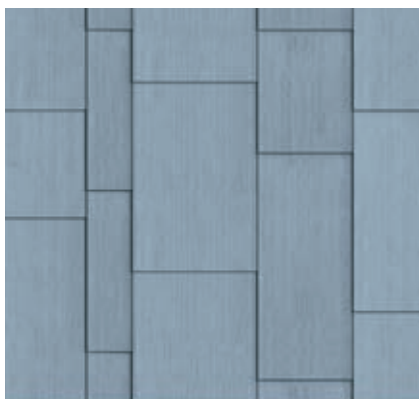


Random structure

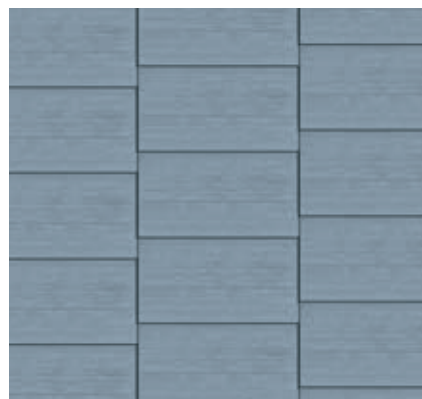

Diagonal staggered

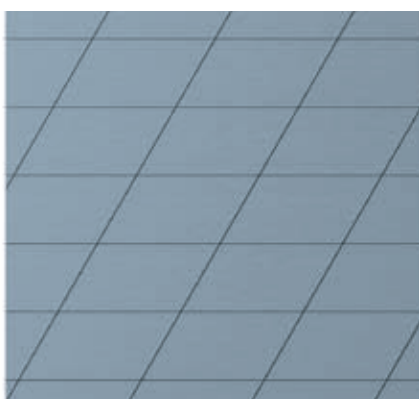

Cross-joint

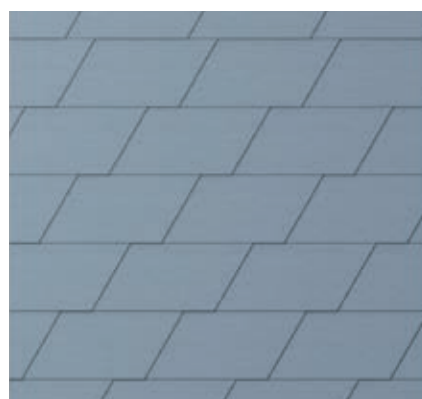

1/4 staggered



Private residence, Strasswalchen, Austria

2.1.5 Thermal Expansion

As a rule flat-lock tiles are indirectly fixed into the substructure using tested RHEINZINK clips or clip rails. The general waviness typical of thin metal sheeting depends on the thickness of the metal and the source material selected.

RHEINZINK material 1.00 mm thick is less wavy than 0.7 mm or 0.8 mm thick titanium zinc. Sheet metal is used as standard for the production of RHEINZINK-Flat-Lock Tiles. This in turn reduces the effect of the tendency towards waviness. Indirect fixing allows the tiles to expand freely.




Construction of a new day hospital for the psychiatric care of children and adolescents, Düsseldorf, Germany

CRYSTAL TILE

2.2 RHEINZINK-Crystal Tile

The RHEINZINK-Crystal Tile is a refined design for façade cladding with an innovative embossing technique. It is based on the RHEINZINK-Flat-lock Tile and is manufactured in the material variant RHEINZINK-prePATINA blue-grey. The RHEINZINK-Crystal Tile is available both in a left and right design.

The system solution opens up a variety of design options to you. Regardless of whether you opt for a 1/2 offset, a 1/4 offset or a design with the visually quieter cross-joint, the result is always convincing. With the offset design, a very lively look is realised in connection with the four embossings. The vertical seams that are strikingly visible with smooth tile claddings virtually disappear in the process.

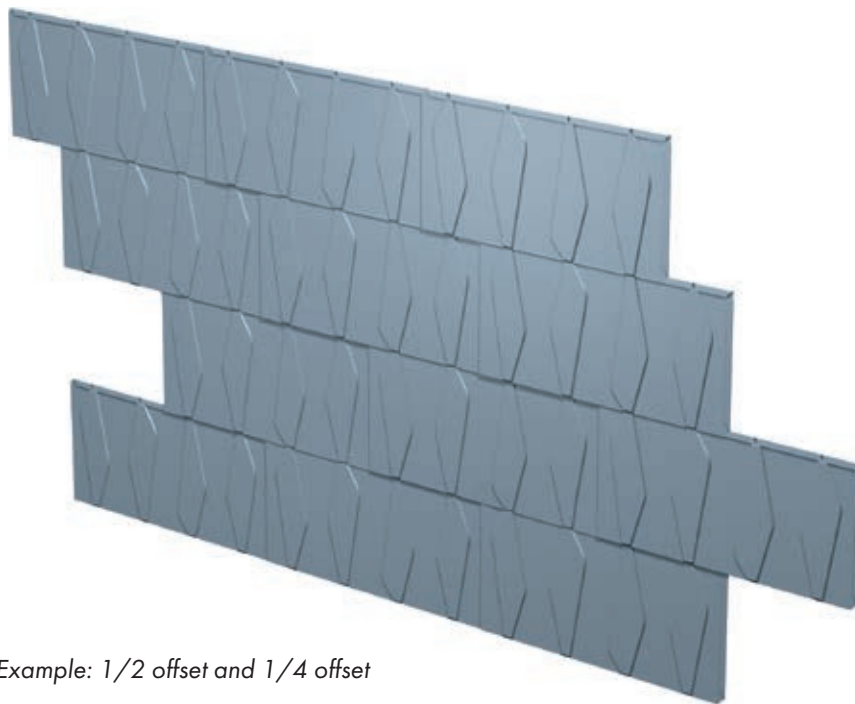


Example: 1/2 offset and 1/4 offset

2.2.1 Profile Geometry


- Metal thickness $s = 0.7\text{ mm}$
- Weight 6.24 kg/m^2
- Cover width $425 \times 935\text{ mm}$
($0,4\text{ m}^2$)
- Tile dimension $448 \times 955\text{ mm}$

2.2.2 Fixing

The RHEINZINK-Crystal Tiles are attached on the upper end with four tested, stainless steel fastening screws ($4.5 \times 25\text{ mm}$) and fastened so that they are covered. Due to the small dimensions ($448 \times 955\text{ mm}$), the temperature-induced change in length of the crystal tiles can be disregarded.

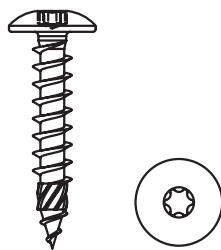

Stainless steel fastening screw

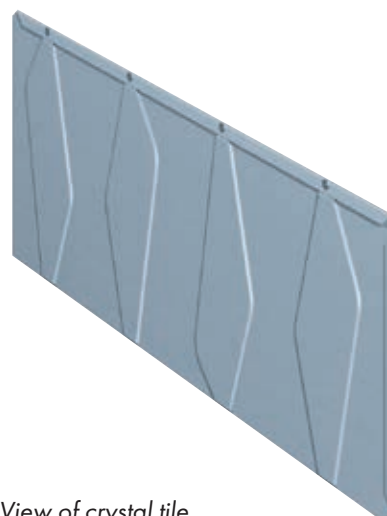

View of crystal tile





Crystal facade: The alternating arrangement of the embossing provides for a lively structure.



*Lateral capping
The crystal tiles are cut to length individually and suspended in the prefabricated connection profile.*



*Base connection
The crystal tiles are suspended in the prefabricated base profile.*

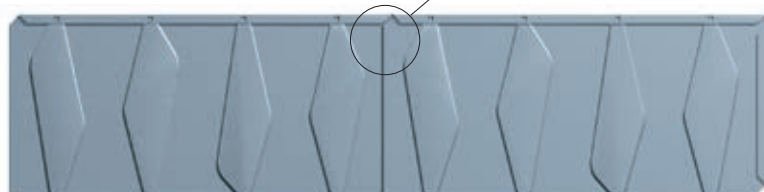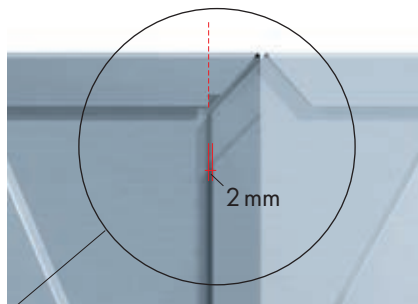

2.2.3 Detailed Solutions

The construction profiles required for the corners, jambs, flashing and cappings are identical to those profiles of the traditional RHEINZINK-Flat-lock Tile System used for the known detailed designs. They can be easily and simply adopted.

2.2.4 Installation Instructions

- Installation direction from bottom to top
 - from right to left
 - from left to right:
- The required fastening screws are included in the scope of delivery.

The crystal tile receives an additional notching on the edge of the upper fold-back. It is an identification mark that specifies the location of the tile that follows laterally (red line). This results in a margin of 2 mm in the lateral overlap, which allows a stress-free expansion and a minimal tolerance during installation. The craftsman must adhere to the spacing of 2 mm during installation, as the distribution of the embossing is tailored to this and only in this way does a correct vertical transition of the embossings take place from tile to tile.

The spacing of the tiles in the horizontal plug-in seams is determined by the craftsman at his own discretion.

SUBSTRUCTURES

2.3 Substructures


Sketches 1a, 1b: Timber Substructure

Advantages:

- Tiles can be fastened at all points of the substructure
- Full-surface support provides protection from impact

Disadvantages:

- The cost of installing thick insulation material is very high
- The cost and timing involved to adjust positive and negative tolerances on the supporting structure is high
- Only B2-designs are possible (Fireproof Classification B2, DIN 4102)

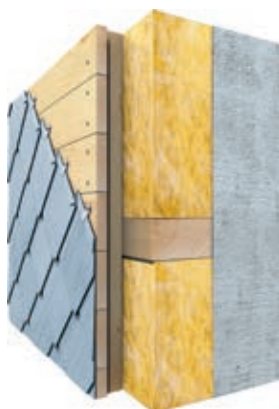

Sketch 1a



Sketch 1b

Sketches 2a, 2b: Metal Substructure (Example with tile size 333/600 mm)

Advantages:

- Fireproof design of A1-facades is possible (Fireproof Classification A1, DIN 4102)
- The cost of installing thick insulation material is reasonable
- Tolerances in the supporting structure can be adjusted easily

Disadvantages:

- Increased cost of installation



Sketch 2a



Sketch 2b

Sketches 3a, 3b: Combined Substructure of Timber/ Metal (Example with tile size 333/600 mm)

Advantages:

- The cost of installing thick insulation materials (> 120 mm) is reasonable
- Full-surface support provides protection from impact
- Tiles can be fastened at all points of the substructure

Disadvantages:


- Fireload because of the timber content the facade construction




Sketch 3a



Sketch 3b

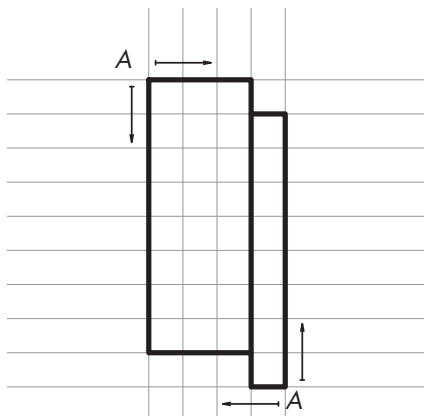

Installation from various starting points

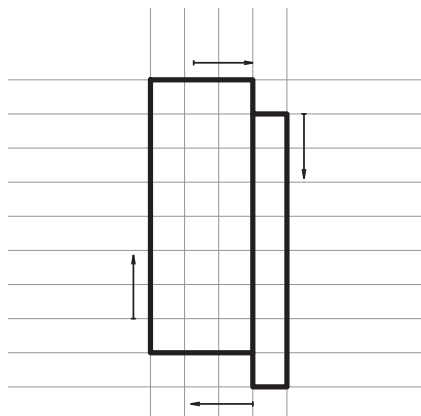


Continuous installation

2.4 Installation Sequences

Direction of Installation (DI)


Start at the left and at the right

Flat-lock tiles are installed from the bottom to the top. The direction of installation – from right to left or from left to right - is determined by the appearance desired. Building tolerances can only be balanced slightly using individual flat-lock tiles. Tolerance equalization by using adaptor tiles should not exceed 15 mm of the overall height, in order not to impede the aesthetics. The overall length should be proportional to the overall height.

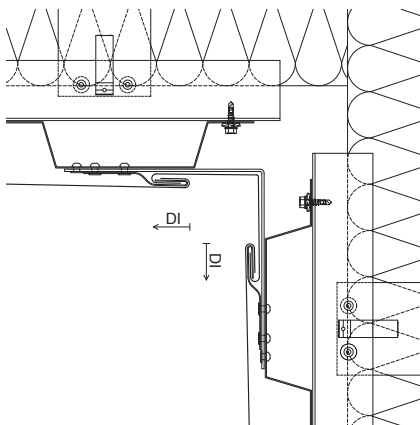

Inside corner

The inside corner profile allows installation to be done to the left and to the right using two different installation teams.

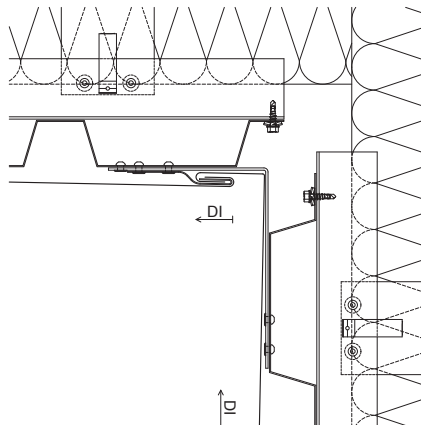

Inside corner using adaptor tiles

When this type of installation is used, a continuous horizontal visual orientation is accentuated.

DETAIL DESIGN

2.5 Detail Design

The design and quality of details determines the appearance of the facade.

Details such as building corners, window reveals, roof edges, bases, as well as connections and terminations can be transformed with special tiles or building profiles. It is an indication of a good overall design, if the components are well-coordinated.

Three fundamental design variations are indicative of this.


Width of building Profile or Section

The spectrum ranges from sharp-edged profiles to profiles that are several centimeters wide. Exact planning makes it possible to design all of the connection and structural profiles the same, or, to vary these proportionately, as desired.


Projection of Profiles

Depending on the detail design, profiles either protrude from the facade surface or are flush with it. The overview clarifies the principle of flush connections:


- **Window lintel**
Installation of RHEINZINK-Flat-Lock Tile on full-surface timber boarding. Lintel and reveal profiles form a frame with a face of ca. 60 mm. The lintel profile is partially perforated and comes with a drip edge.
- **Windowsill**
The frame width of the lintel and reveal panels is determined by the face of the windowsill. In this case, the substructure is designed as Fire-proof Classification A1 (DIN 4102).
- **Outside corner**
The outside corner profile corresponds directly with the window connection profiles. Due to the flush design, the visual affect is very conservative.

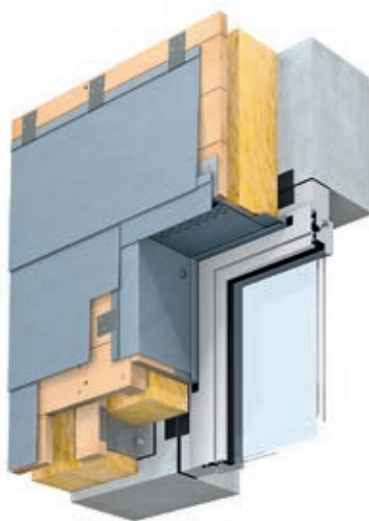

*Window lintel/
Timber-metal-substructure*

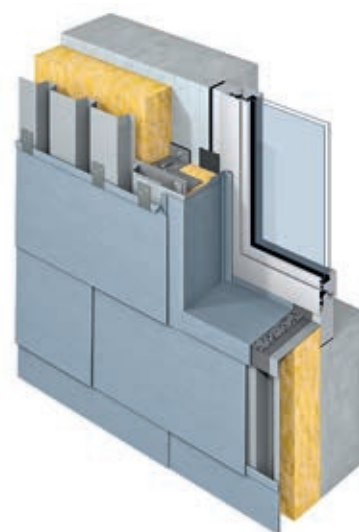

*Window reveal/
Metal-substructure*

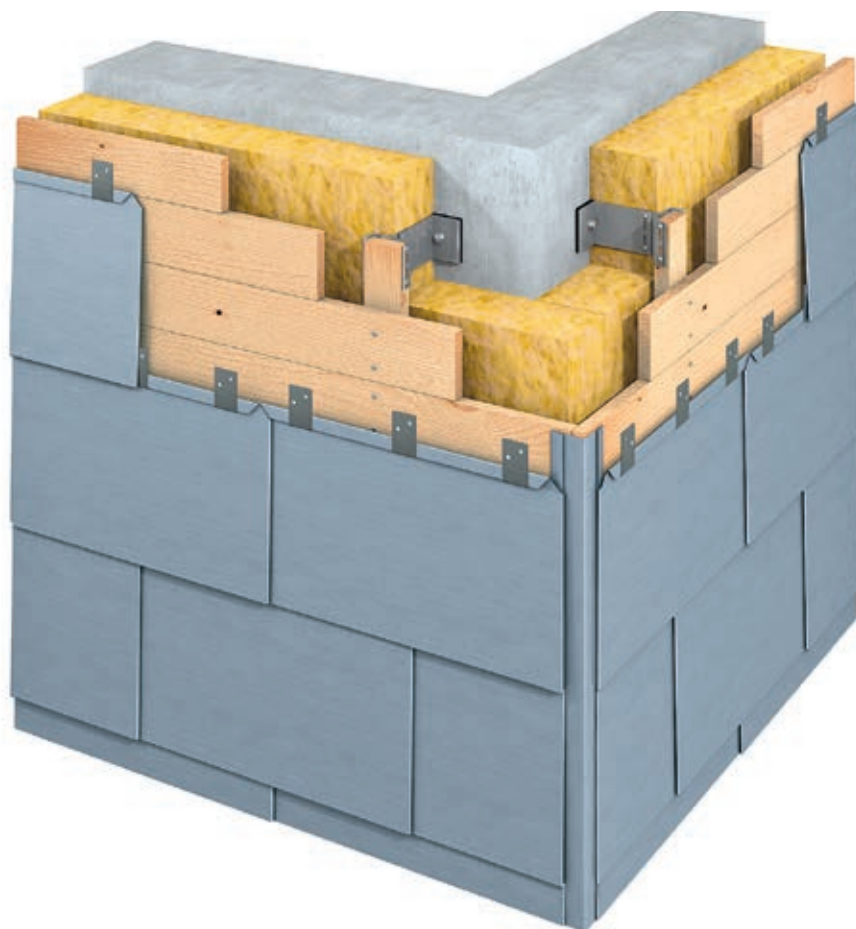

*Outside corner/timber-metal-substructure
(Example with tile size 333/600 mm)*

2.6 Details

2.6.1 General Instructions

Third party Trades

Contracting third party trades for the facade cladding connections is necessary and unavoidable in most cases, to ensure impermeability. Because of the warranty obligations on the part of the craftsman, sub-contracting connections and fasteners to third party trades (e.g. windows), must always be approved by the project manager of the trade in question.

Wall Construction

Layered construction is commensurate with a rear-ventilated metal facade. A solid brick or concrete wall serves as the supporting structure. Of course, it can also be substituted with a column or steel support structure.

Substructure

see Chapter 2.3

Load Effect

The surface loads (wind suction/wind pressure), which affect the facade and the distance of the fasteners associated therewith, should be taken from the current Sheet Metal and Roofing Code. We would be happy to advise you on the system loads of RHEINZINK tiles for individual cases.

Installation Instructions

Detailed discussion pertaining to installation sequences has been left out deliberately, because in practical terms, these are heavily influenced by the supporting trades such as window and steel construction, etc.

Installation sequences should be determined separately for each project, taking into account the interfaces and installation sequence for each project. Noteworthy deviations are pointed out for different details.

Drip Edges

The requirements as set out by standards and regulations must be taken into account for detail design, for example, drip edges over stucco facades (soiling as a result of atmospheric deposits).

Diagonal Installation

RHEINZINK-Flat-Lock Tiles can also be used in a diagonal facade segmentation. In most instances, the technical design of the structure, in this case, corresponds to that of horizontal installation.

2.6.2 Pictogram

Horizontal sections (see page 28)

H1: Outside corner

H2: Inside corner

H3: Window reveal

H4: Joint/lengthwise expansion separation

Vertical section (see page 29)

V1: Base

V2: Windowsill

V3: Window lintel

V4: Roof edge

Variations

In some cases, variations are shown for the same detail (e.g. window lintel with/without sun shade). These are marked and explained with additional texts or drawings.

Applicability

The details and designs outlined here are suggestions, which were carried out on various projects. The detail suggestions must always be coordinated responsibly, taking into account the applicable standards and stipulations, as well as the designer's intentions for the project.

Building height	Overlap	Distance to drip edge
≤ 8 m	≥ 50 mm	≥ 20 mm
> 8 m ≤ 20 m	≥ 80 mm	≥ 20 mm
> 20 m	≥ 100 mm	≥ 20 mm

*Distance and overlap dimensions for flashings
(e.g. windowsills, wall copings, verge profiles, etc.)*

PLANNING GRID

production precision.

These components determine the aesthetics through precise horizontal and vertical segmentation.

Penetrations and terminations, which are not coordinated with the axial segmentation are obtrusive.

The following instructions serve to provide for proper planning of facade segmentation:

Principles

Generally speaking, a distinction must be made between new buildings and renovations when discussing grid difficulties.

In the case of new buildings, the facade grid can be matched to the design; penetrations such as windows, chimney pipes, etc. are always ancillary to the grid.

However, when it comes to renovations, the penetrations (e.g. windows) are immovable, so that the grid must be coordinated with the penetrations. Aesthetically speaking, a random structure is best suited for this.

The following principles apply to grid deviations:

- One should start or end with a whole module (x or y) at the transitions
- Dimensional discrepancies of maximum 15 mm (deviations from module x or y on two-dimensional profiles) are not noticeable.
- Dimensional tolerances (dimensional change of x or y) which cannot be corrected, must be compensated in the windowsill or roof edge area.
- Adaptations or displacements of grid heights (height coordinates) can only be carried out in the roof edge and/or base area.



Module Y

Y corresponds to the smallest unit of the facade segmentation, which repeats itself, e.g. the baywidth. Grid module Y determines the precise location of penetrations and transitions. In the case of flat-lock tiles, dimension y can be produced with cover widths of 333 mm to 800 mm, depending on the project. Dimensions > 600 mm must be discussed and agreed upon with RHEINZINK's Department of Application Technology.


The cover width (y) is determined by the face or surface view of the tile from drip edge to drip edge.

Dimension X

All of the segments marked with an x are a whole multiple of the selected module y and, as a rule, correspond to the cover width of a tile.

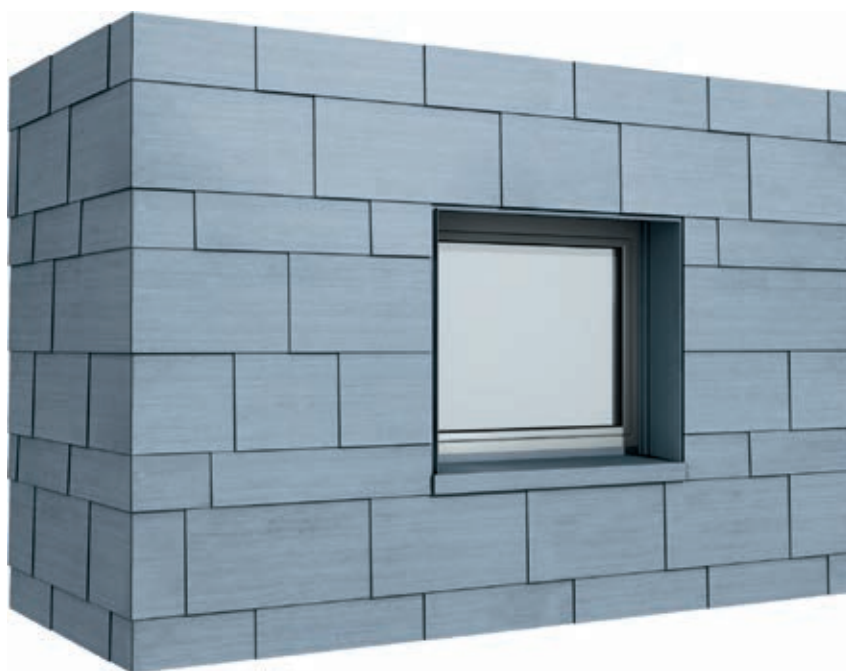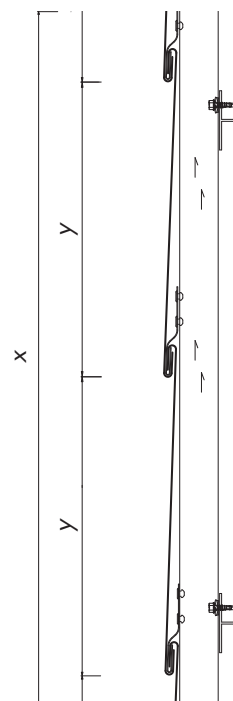

Random structure, horizontal installation

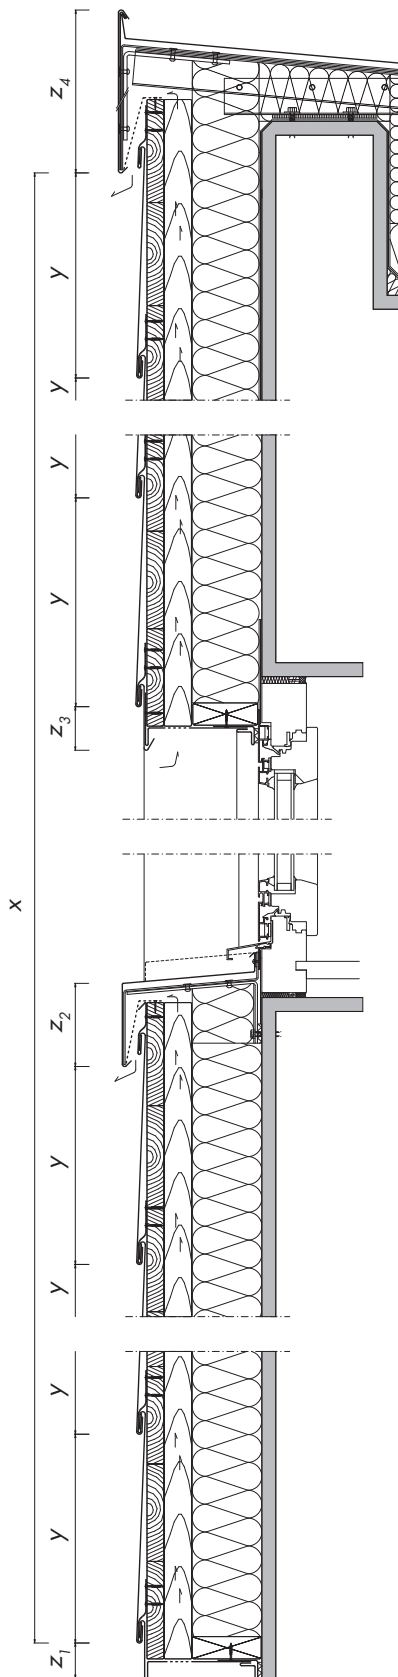

Position Z4: Roof Edge
Grid for new Buildings,
respectively Renovations

If the height coordinates of the roof edge do not fit into the grid selected, the following corrective measures may be selected:

- Change the roof edge profile/slope
- Lower or raise the parapet or the roof edge board.

As a rule, both of these possibilities only exist if the flat roof is being renovated at the same time.

- Changing module X or Y

Position Z3: Window lintel

Position Z2: Windowsill

Grid Planning for new Buildings

- Determine openings of building shell
- Establish window frame profiles
- Establish location of window
- Establish profile geometry of window connections
- Develop design details within the grid

Grid planning for renovation projects

- Establish window frame profile, new/old
- Establish location of window, new/old
- Establish the profile geometry of window connections
- Establish design details within the grid

If the location of the window or detail does not fit into the grid, the following corrective measures may be selected:

- Change the profile geometry of the window lintel profile or the windowsill
- Adapt to the height of the window
- Change the slope of the windowsill
- Change the X or Y module

Position Z1: Base

Grid Planning for new Buildings,
respectively Renovations

- Define potential deviations toward the top or the bottom
- Establish the profile geometry of the base detail

If the location of the base does not fit into the grid, the following corrective measures may be selected:

- Move the facade connection toward the top or the bottom
- Change the profile geometry of the base profile
- Lower or raise the plinth masonry, if it has been planned for or if it already exists

2.8 Examples of Applications


RHEINZINK - Flat-Lock Tile


Diagonal installation in square shape with pre-rounded window profiles



RHEINZINK - Flat-Lock Tile

Horizontal installation, 1/2 staggered, flush window profile, profile width > 60 mm; baywidth and bay length of flat-lock tile coordinated with overall design.

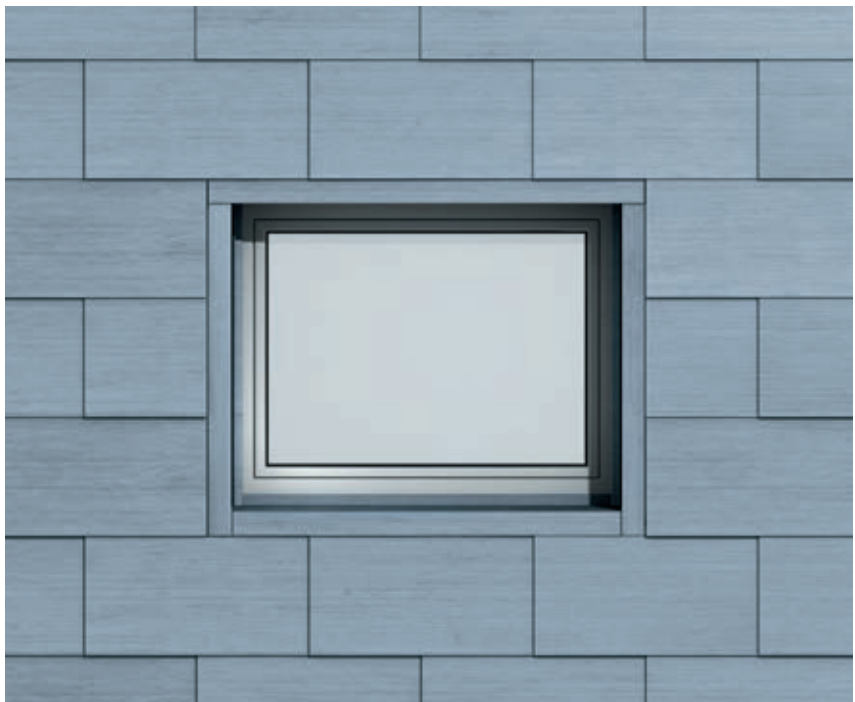

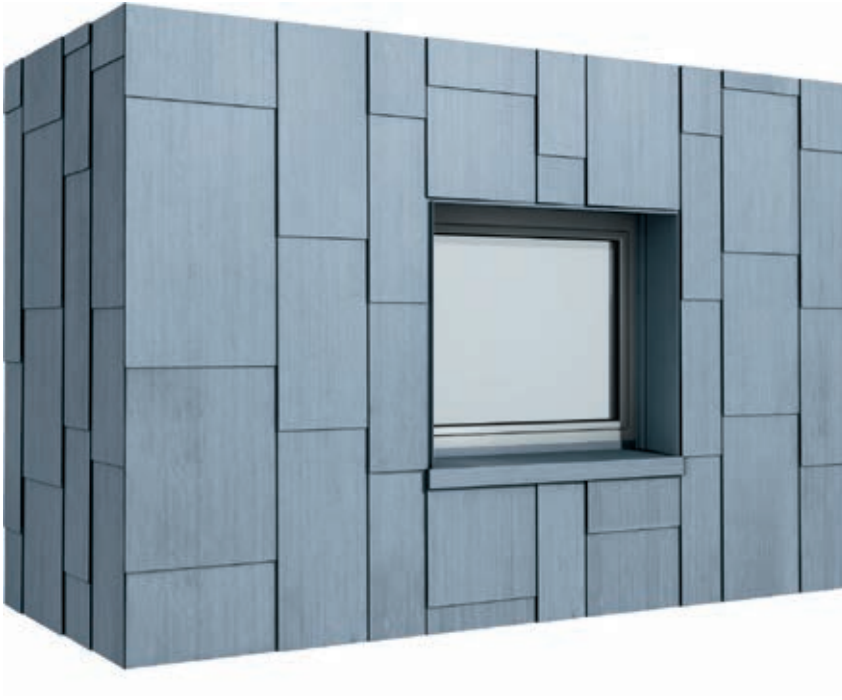

RHEINZINK - Flat-Lock Tile

Vertical installation, random structure, window surround and outside corner – very conservative visually.

RHEINZINK - Flat-Lock Tile

Horizontal installation, window profiles and outside corner – matched to fit the face width.




DESIGN


OVERVIEW OF HORIZONTAL APPLICATION

2.9 Flat-lock Tile Design, horizontal Section


Detail H1: Outside corner, page 30



H1.1




H1.2




H1.3


Detail H2: Inside corner, page 32



H2.1




H2.2




H2.3


Detail H3: Windows reveal, page 34



H3.1




H3.2




H3.3

Detail H4: Connections/Terminations, page 36




H4.1

Timber substructure



H4.2

Timber-metal-substructure




H4.3


Metal substructure

2.9 Flat-lock Tile Design, vertical Section


Detail V1: Base, page 38



V1.1




V1.2




V1.3


Detail V2: Windowsill, page 40



V2.1




V2.2




V2.3


Detail V3: Window lintel, page 42



V3.1




V3.2




V3.3


Detail V4: Roof edge, page 44



V4.1



V4.2



V4.3


Timber substructure

Timber-metal-substructure


Metal substructure

DESIGN – HORIZONTAL APPLICATION
DETAIL H1, OUTSIDE CORNER

H1.1

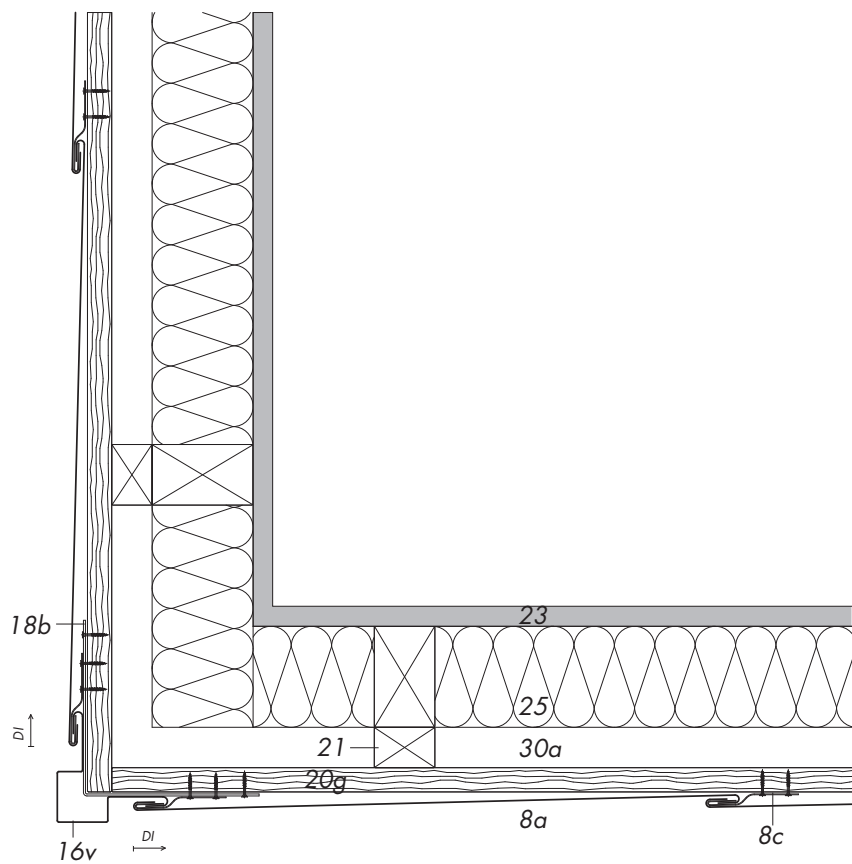


H1.2

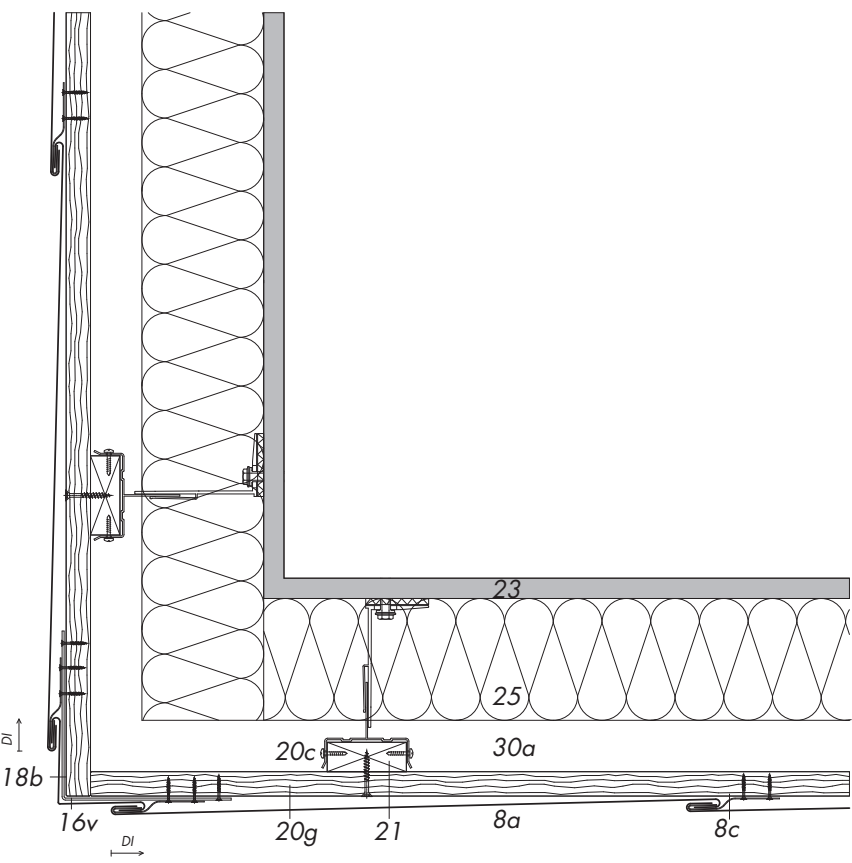

DESIGN – HORIZONTAL APPLICATION
DETAIL H1, OUTSIDE CORNER

H1.3

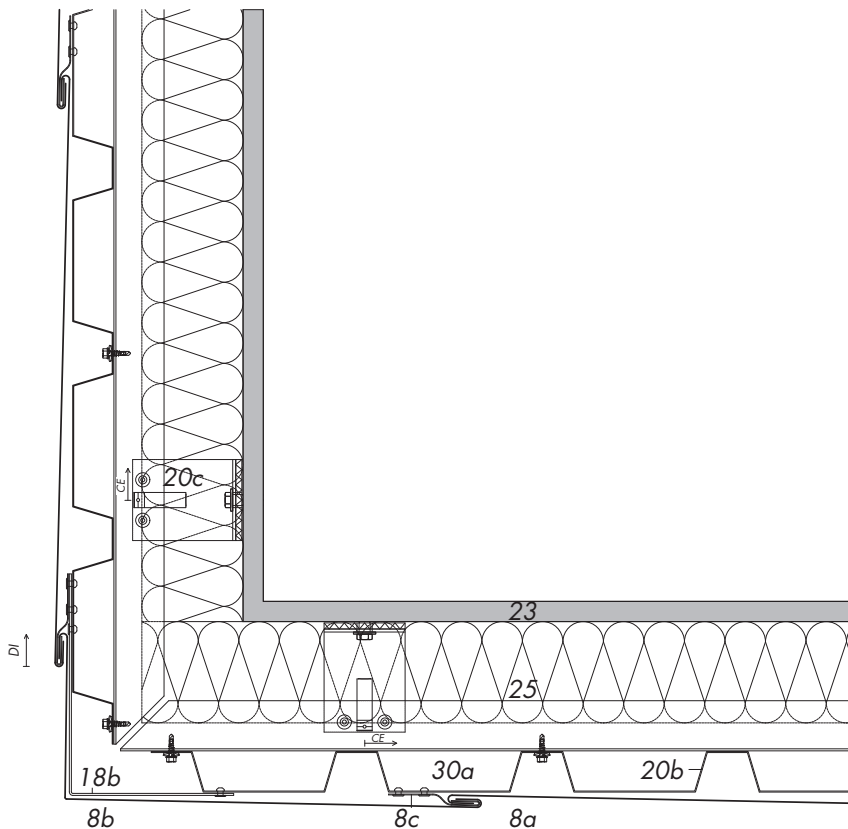

2.9.1 Detail H1: Outside Corner

- 8 RHEINZINK-Tile
 - a Standard tile
 - b Fitting tile
 - c Short clip/clip rail
- 16 RHEINZINK-Building Profile
 - v Corner profile
- 18 Support Profile
 - b Aluminium
- 20 Substructure
 - b Metal, trapezoidal steel deck with coating *
 - c Bracket system, with thermal break *
 - g Softwood boarding, thickness min. 24 mm, width max. 100 mm
- 21 Batten/Squared Timber
- 23 Supporting Structure
- 25 Thermal Insulation
- 30 Ventilated Air Space
 - a Depth of air space ≥ 20 mm


DI Direction of installation
CE Controlled expansion of substructure

* Manufacturers' guidelines must be observed

Technical drawing showing a corner joint in a wall and floor assembly. The drawing includes the following labels and features:

- 23**: Label for the top horizontal surface (ceiling).
- 25**: Label for the top horizontal surface (ceiling).
- 30a**: Label for the top horizontal surface (ceiling).
- 20g**: Label for the top horizontal surface (ceiling).
- 8a**: Label for the top horizontal surface (ceiling).
- 18b**: Label for the vertical surface (wall).
- 16v**: Label for the vertical surface (wall).
- 8c**: Label for the vertical surface (wall).
- DI**: Label for the distance between the wall and the ceiling.
- Δ**: Label for the distance between the wall and the ceiling.

DESIGN – HORIZONTAL APPLICATION
DETAIL H2, INSIDE CORNER

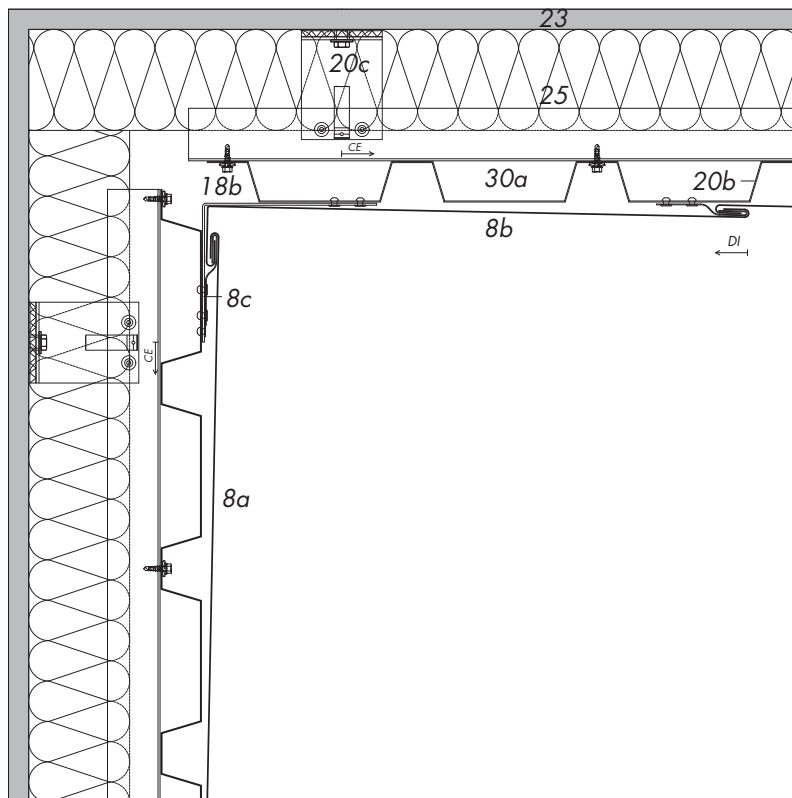

H2.3

2.9.2 Detail H2: Inside Corner

- 8 RHEINZINK-Tile
 - a Standard tile
 - b Fitting tile
 - c Short clip/clip rail
- 16 RHEINZINK-Building Profile
 - v Corner profile
- 18 Support Profile
 - b Aluminium
- 20 Substructure
 - b Metal, trapezoidal steel deck with coating*
 - c Bracket system, with thermal break*
 - g Softwood boarding, thickness min. 24 mm, width max. 100 mm
- 21 Batten/Squared Timber
- 23 Supporting Structure
- 25 Thermal Insulation
- 30 Ventilated Air Space
 - a Depth of air space ≥ 20 mm


DI Direction of installation
CE Controlled expansion of Substructure

*Manufacturers' guidelines must be observed


FLAT-LOCK TILES, DESIGN AND APPLICATION

DESIGN – HORIZONTAL APPLICATION DETAIL H3, WINDOW REAVEAL

H3.1

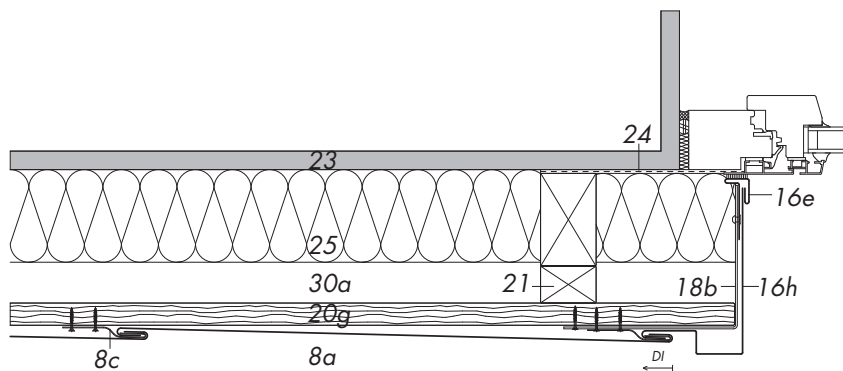


H3.2

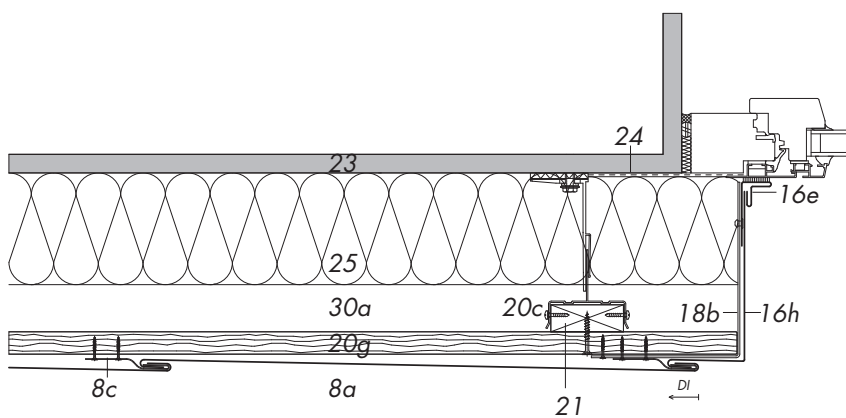

DESIGN – HORIZONTAL APPLICATION
DETAIL H3, WINDOW REVEAL

H3.3

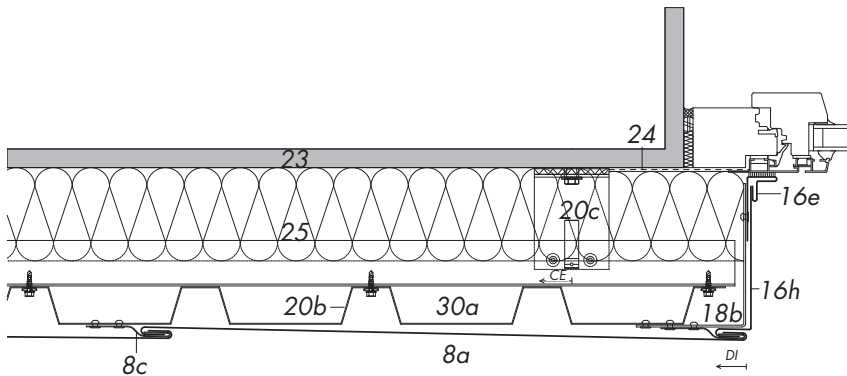


2.9.3 Detail H3: Window Reveal

- 8 RHEINZINK-Tile
 - a Standard tile
 - c Short clip/clip rail
- 16 RHEINZINK-Building Profile
 - h Jamb profile
 - e Receiver strip, with sealant tape
- 18 Support Profile
 - b Aluminium
- 20 Substructure
 - b Metal, trapezoidal steel deck with coating*
 - c Bracket system, with thermal break*
 - g Softwood boarding, thickness min. 24 mm, width max. 100 mm
- 21 Batten/Squared Timber
- 23 Supporting Structure
- 24 Window Foil
- 25 Thermal Insulation
- 30 Ventilated Air Space
 - a Depth of air space ≥ 20 mm

DI Direction of installation
CE Controlled expansion of substructure

* Manufacturers' guidelines must be observed

DESIGN – HORIZONTAL APPLICATION DETAIL H4, CONNECTIONS/TERMINATIONS

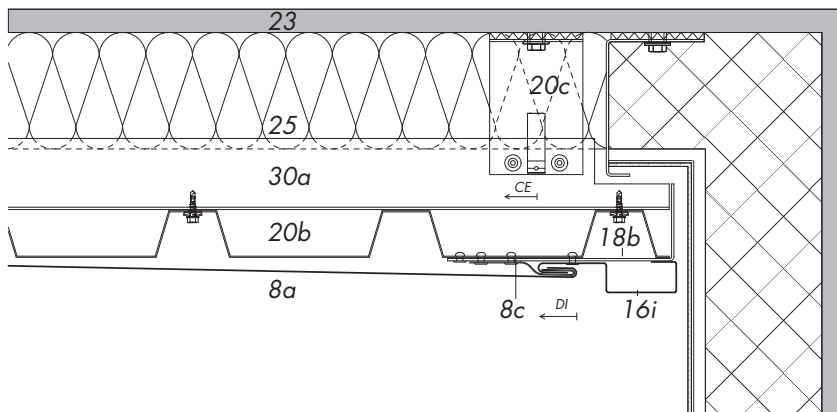

H4.3

2.9.4 Detail H4: Connections/ Terminations


- 8 RHEINZINK-Tile
 - a Standard tile
 - c Short clip/clip rail
- 16 RHEINZINK-Building Profile
 - e Receiver strip, with sealant tape
 - i Connection/termination profile
- 18 Support Profile
 - b Aluminium
- 20 Substructure
 - b Metal, trapezoidal steel deck with coating*
 - c Bracket system, with thermal break*
 - g Softwood boarding, thickness min. 24 mm, width max. 100 mm
- 23 Supporting Structure
- 25 Thermal Insulation
- 30 Ventilated Air Space
 - a Depth of air space ≥ 20 mm

DI Direction of installation
CE Controlled expansion of Substructure


* Manufacturers' guidelines must be observed

DESIGN – HORIZONTAL APPLICATION
DETAIL V1, BASE


V1.1

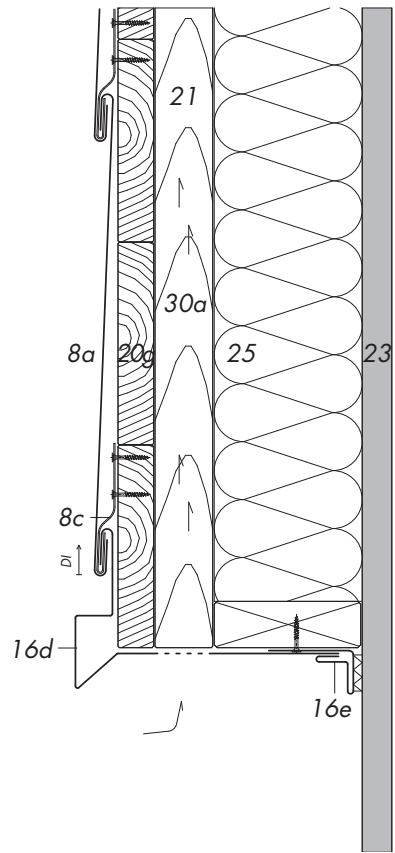

V1.2

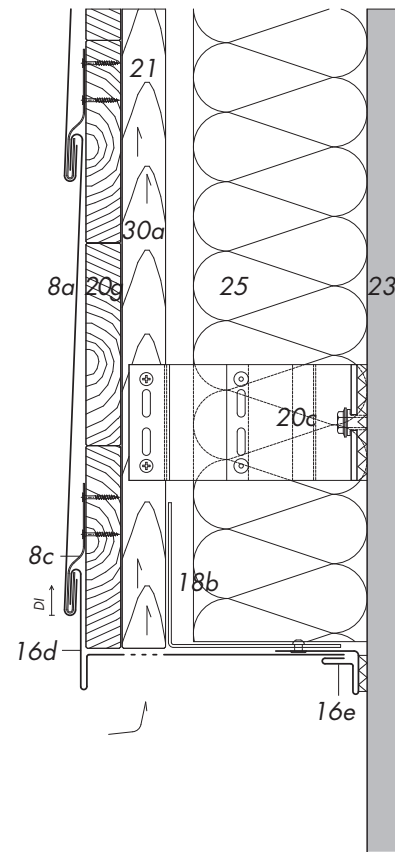

V1.3

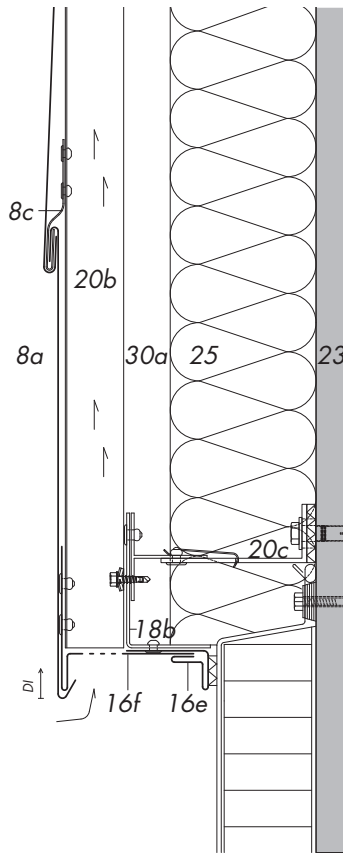

2.9.5 Detail V1: Base


- 8 RHEINZINK-Tile
 - a Standard tile
 - c Short clip/clip rail
- 16 RHEINZINK-Building Profile
 - d Base profile, partially perforated
 - e Receiver strip, with sealant tape
 - f Base trim, partially perforated
- 18 Support Profile
 - b Aluminium
- 20 Substructure
 - b Metal, trapezoidal steel deck with coating*
 - c Bracket system, with thermal break*
 - g Softwood boarding, thickness min. 24 mm, width max. 100 mm
- 21 Batten/Squared Timber
- 23 Supporting Structure
- 25 Thermal Insulation
- 30 Ventilated Air Space
 - a Depth of air space ≥ 20 mm

DI Direction of installation

* Manufacturers' guidelines must be observed

DESIGN – HORIZONTAL APPLICATION
DETAIL V2, WINDOWSILL

V2.3

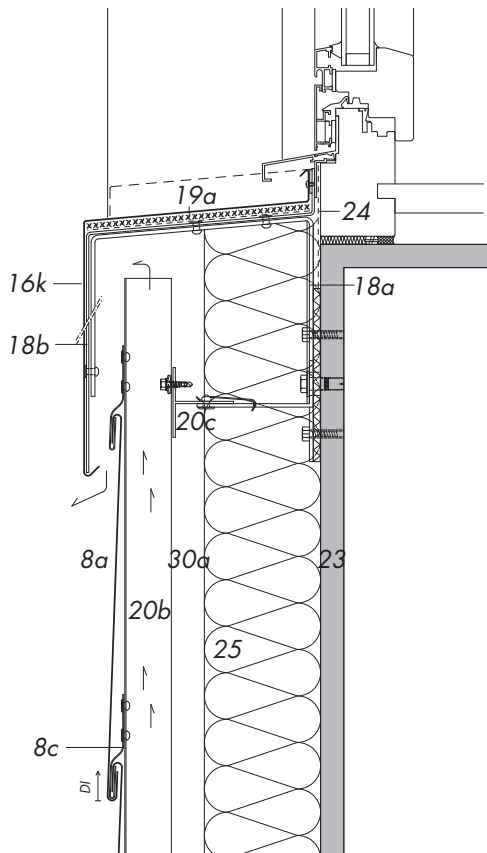


2.9.6 Detail V2: Windowsill

- 8 RHEINZINK-Tile
 - a Standard tile
 - c Short clip/clip rail
 - d Long clip, continuous with water drip
- 16 RHEINZINK-Building Profile
 - c Perforated strip
 - k Window sill coping, $\geq 3^\circ$ slope
- 18 Support Profile
 - a Galvanised steel, support angle with thermal break
 - b Aluminium
- 19 Separating Layer
 - a Structured underlay VAPOZINC
 - Alternative: glued to support profile over entire surface
- 20 Substructure
 - b Metal, trapezoidal steel deck with coating*
 - c Bracket system, with thermal break*
 - g Softwood boarding, thickness min. 24 mm, width max. 100 mm
- 21 Batten/Squared Timber
- 23 Supporting Structure
- 24 Window Foil
- 25 Thermal Insulation
- 30 Ventilated Air Space
 - a Depth of air space ≥ 20 mm


DI Direction of installation

* Manufacturers' guidelines must be observed

V3.1

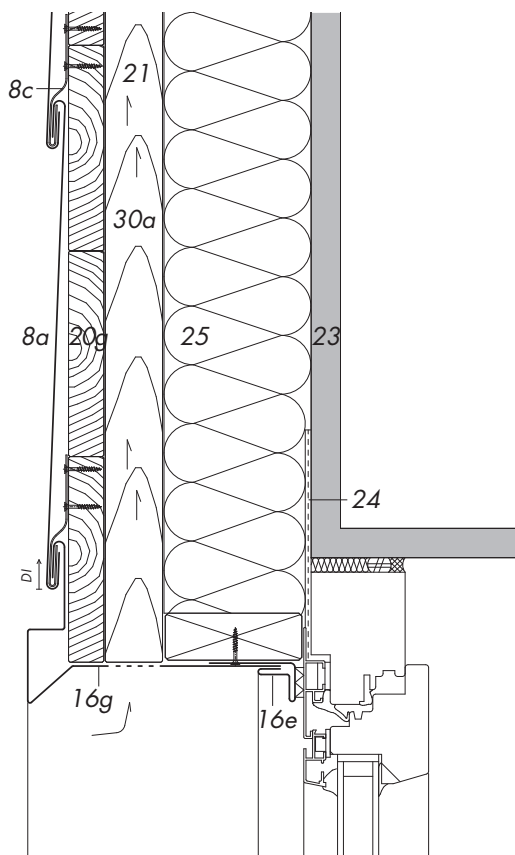


V3.2

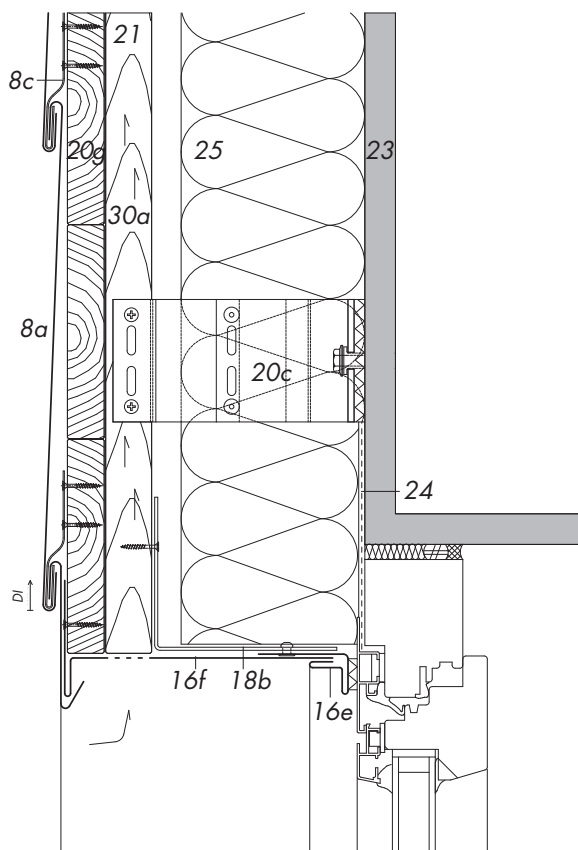

DESIGN – HORIZONTAL APPLICATION
DETAIL V3, WINDOW LINTEL

V3.3

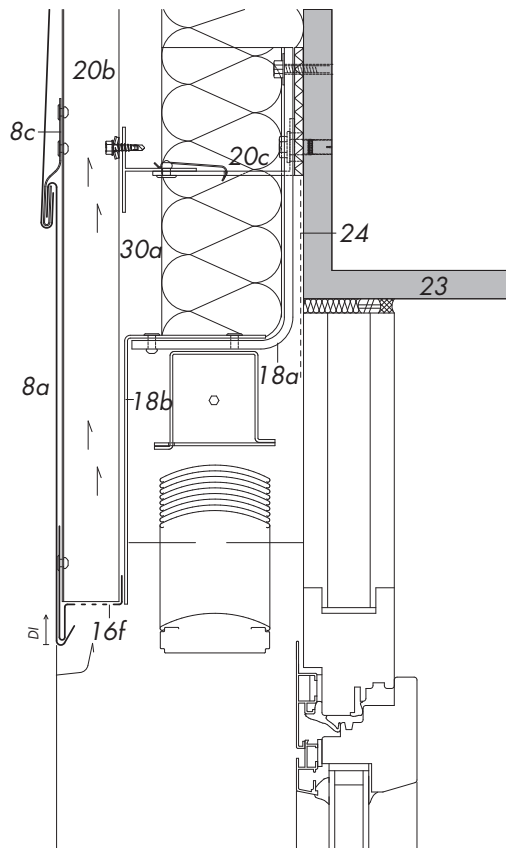


2.9.7 Detail V3: Window Lintel

- 8 RHEINZINK-Tile
 - a Standard tile
 - c Short clip/clip rail
- 16 RHEINZINK-Building Profile
 - e Receiver strip, with sealant tape
 - f Base trim, partly perforated
 - g Lintel profile, partly perforated
- 18 Support Profile
 - a Galvanised steel
 - b Aluminium
- 20 Substructure
 - b Metal, trapezoidal steel deck with coating*
 - c Bracket system, with thermal break*
 - g Softwood boarding, thickness min. 24 mm, width max. 100 mm
- 21 Batten/Squared Timber
- 23 Supporting Structure
- 24 Window Foil
- 25 Thermal Insulation
- 30 Ventilated Air Space
 - a Depth of air space ≥ 20 mm


DI Direction of installation

* Manufacturers' guidelines must be observed

V4.1

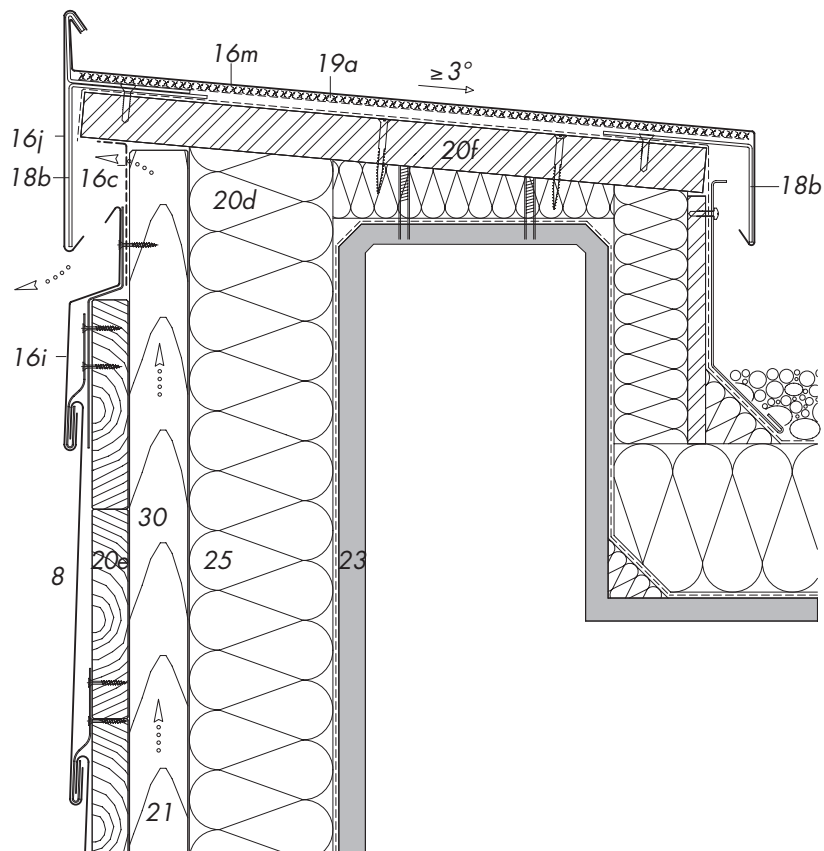


V4.2

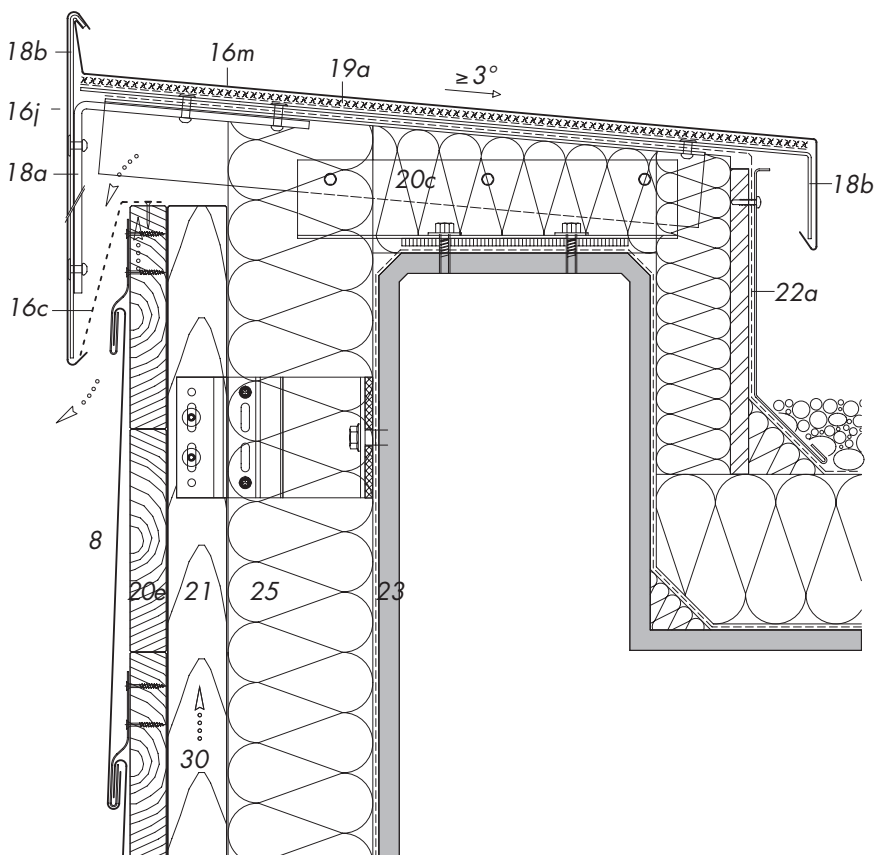

DESIGN – HORIZONTAL APPLICATION
DETAIL V4, ROOF EDGE

V4.3

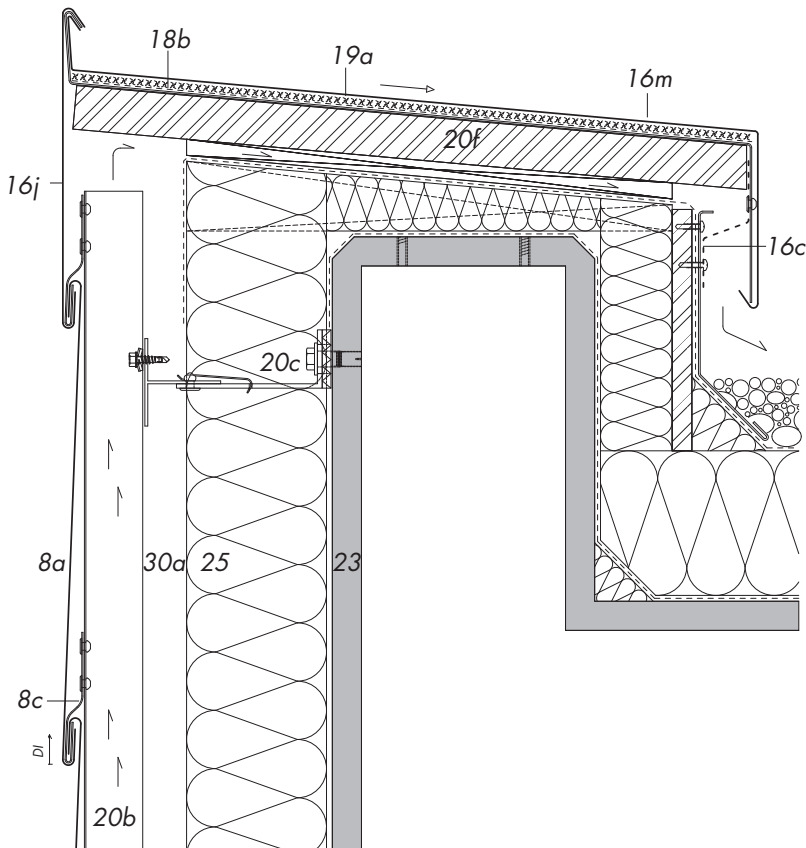


2.9.8 Detail V4: Roof Edge

- 8 RHEINZINK-Tile
 - a Standard tile
 - c Short clip/clip rail
- 16 RHEINZINK-Building Profile
 - c Perforated strip
 - i Termination profile
 - j Fascia profile
 - m Wall coping
- 18 Support Profile
 - a Galvanised steel
 - b Aluminium
- 19 Separating Layer
 - a Structured underlay VAPOZINC, for copings with more than 50 cm width
- 20 Substructure
 - b Metal, trapezoidal steel deck with coating*
 - c Bracket system, with thermal break*
 - d Wood, wooden wedge
 - f OSB/veneer plywood sheathing, thickness min. 22 mm
 - g Softwood boarding, thickness min. 24 mm, width max. 100 mm
- 21 Batten/Squared Timber
- 23 Supporting Structure
- 25 Thermal Insulation
- 30 Ventilated Air Space
 - a Depth of air space ≥ 20 mm

DI Direction of installation

* Manufacturers' guidelines must be observed



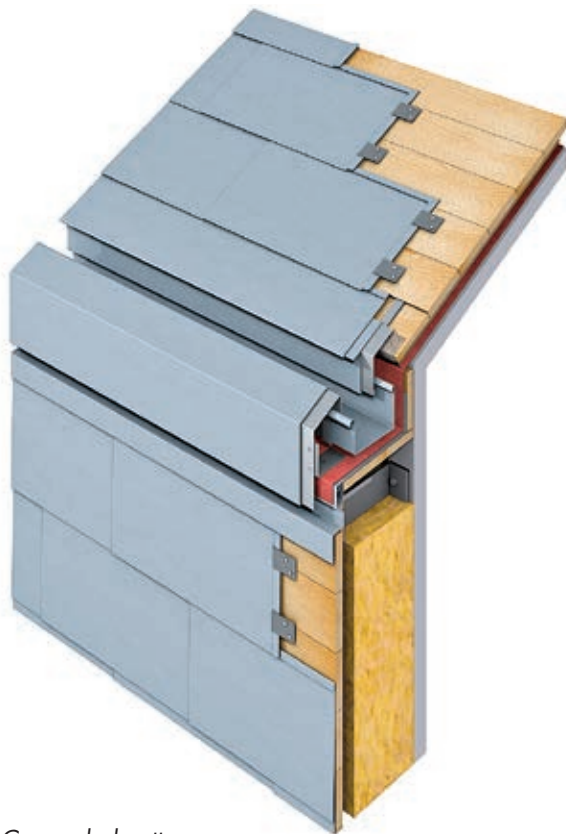

Concealed gutter

2.10 Application with Roofing

The use of tiles for roofing has a long tradition behind it. Numerous examples from the 19th and 20th century involving prestigious buildings and dwellings testify to this skilled craft that dates back so many years.

The design of modern roofs using a large-format tile flush with the wall is a popular design feature among architects and developers. It is even possible to create convex or concave roof surfaces, so offering the planner great scope for design.



When it comes to building roofs with pitches $\geq 10^\circ < 25^\circ$ and $\geq 25^\circ$, RHEIN-ZINK can provide solutions that are not only satisfactory in technical terms but also fulfil high demands in relation to aesthetics.

- Installation options/Orientation
- Format lying parallel to eaves
- Format standing parallel to eaves
- Rectangular/square format positioned diagonal to eaves



ROOF STRUCTURE

2.11 Roof Structure


- Roof pitch $\geq 25^\circ$
- RHEINZINK-Flat-Lock Tile
- Softwood boarding
d ≥ 24 mm, b ≤ 160 mm
- Rear ventilation, height of ventilation space: min. 40 mm
- Underlay covering, including wind and rainproof sealed overlaps

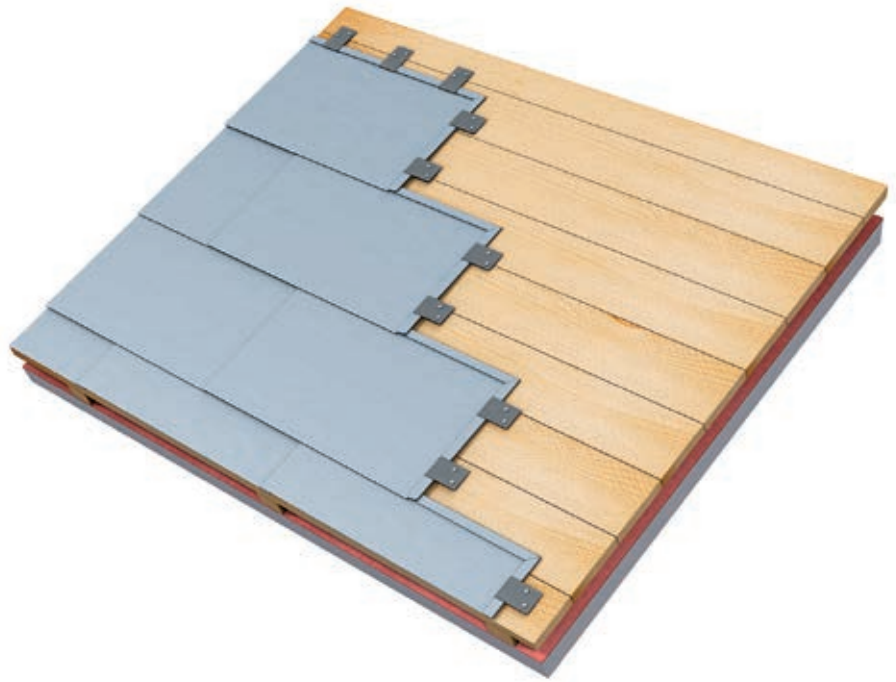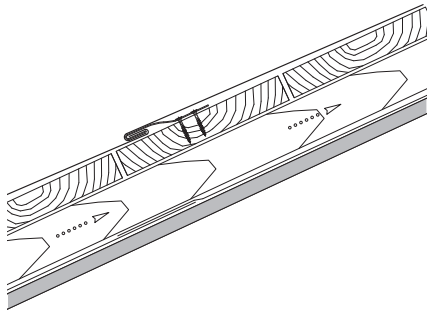

- Roof pitch $\geq 10^\circ < 25^\circ$
- RHEINZINK-Flat-Lock Tile
- Underlay + AIR-Z*
- Softwood boarding
d ≥ 24 mm, b ≤ 160 mm
- Rear ventilation,
height of ventilation space
 $\geq 10^\circ < 15^\circ$: min. 80 mm;
 $> 15^\circ$: 40 mm
- Underlay covering, including wind and rainproof sealed overlaps

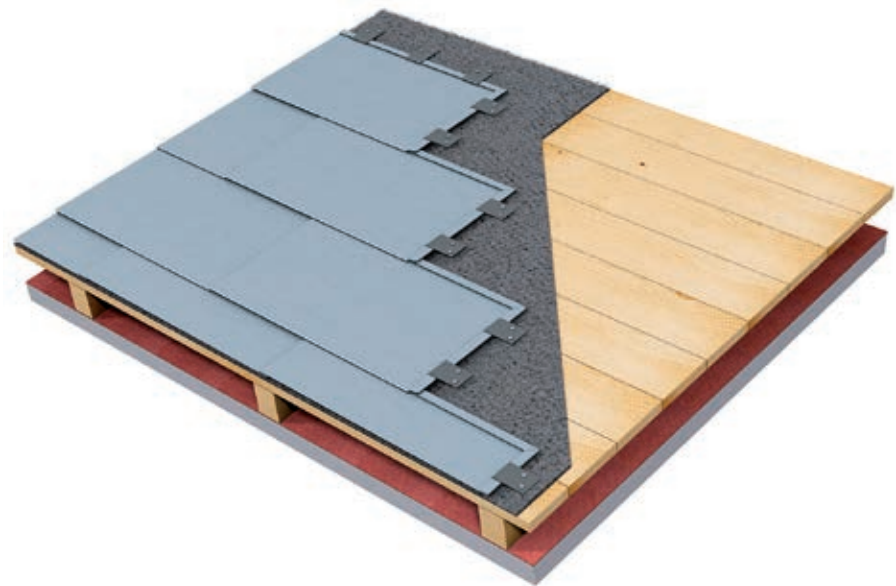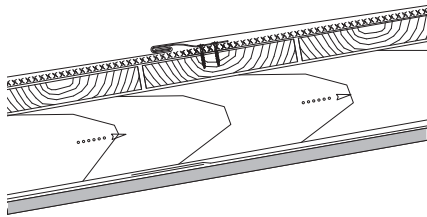

* Underlay of bitumen sheeting with glass fibre or fibreglass inlay as per DIN 52143, DIN 52130 or DIN 52131 in combination with a structured underlay ≤ 8 mm thick (e.g. V13 + AIR-Z)

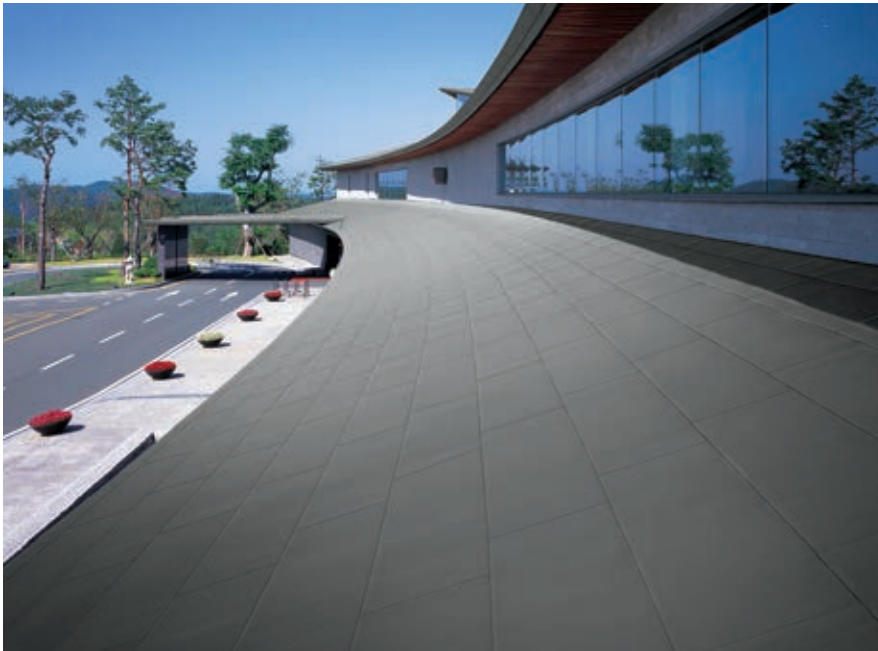


**2.12 RHEINZINK-Flat-Lock Tile,
Roofing Application**

O 'Phel Golf Club, Yeongcheon, Korea




TRUMPF Sachsen GmbH, Neukirch, Germany


2.13 Roofing Design with Flat-lock Tiles

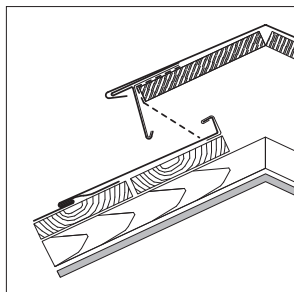


Ridge detail: gable roof
page 52

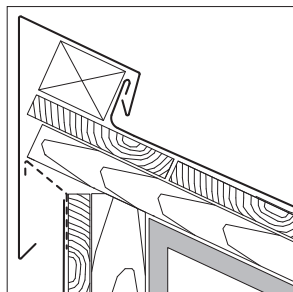


Ridge detail: monopitch roof
page 52

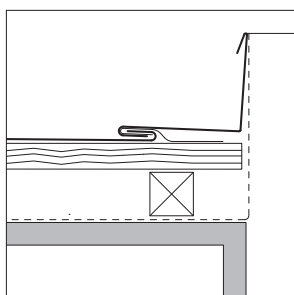


Penetration detail:
Lateral connection, page 53

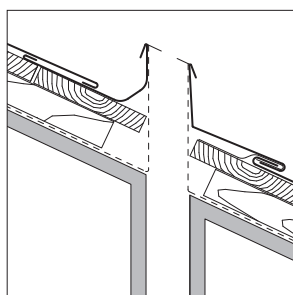

Penetration detail:
Front flashing/back gutter, page 53

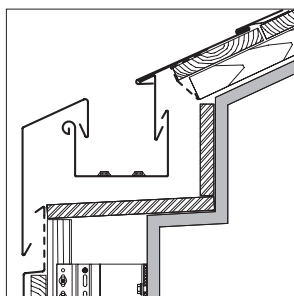


Eaves detail:
Roof-integrated gutter, page 54

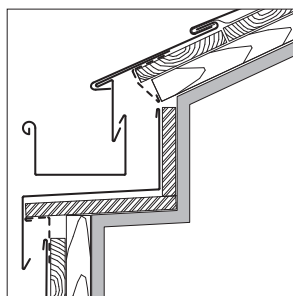


Eaves detail:
Bracket-mounted gutter, page 54


2.13 Roofing Design with Flat-lock Tiles

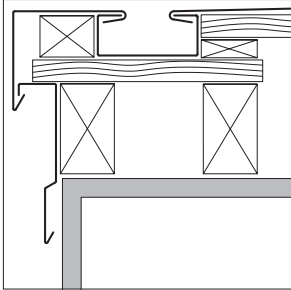


Verge detail: with verge gutter,
page 55

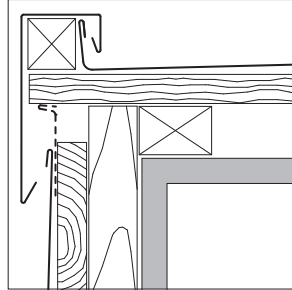


Verge detail: with flashing,
page 55

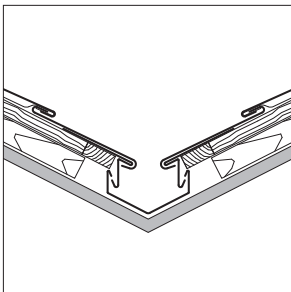


Valley detail: recessed, page 56

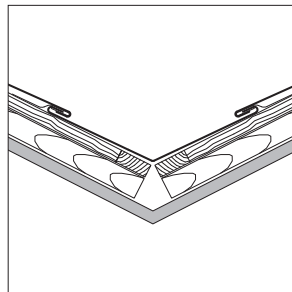

Valley detail: flush, page 56

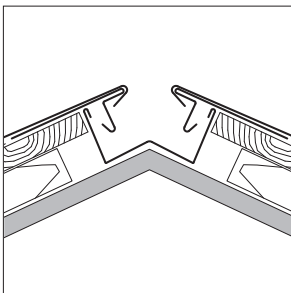


Hip detail flush, page 57

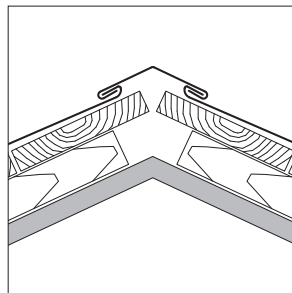


Hip detail with cap, page 57

ROOFING APPLICATION DESIGN
RIDGE DETAIL

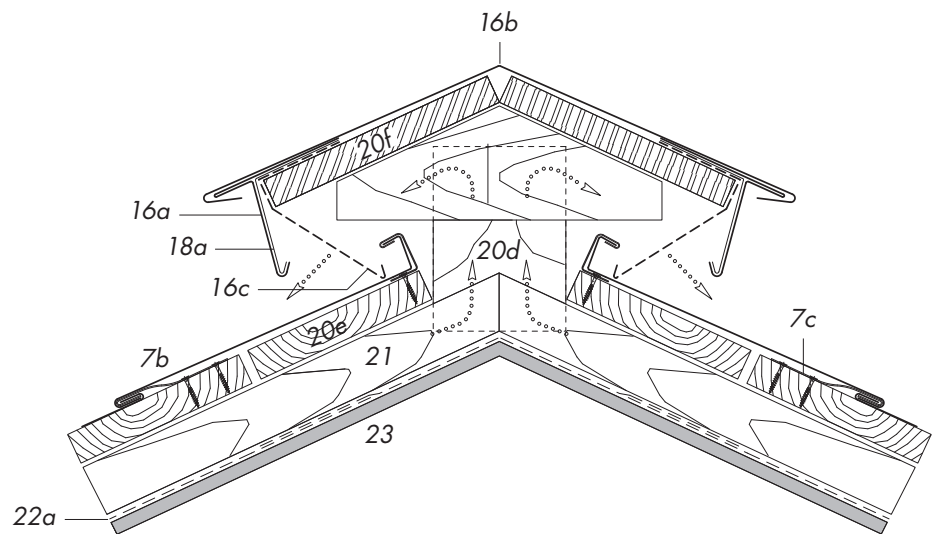


2.13.1 Detail: Ridge

- 7 RHEINZINK-Tile, roof
 - b Fitting tile
 - c Short clip/clip rail
- 8 RHEINZINK-Tile, facade
 - a Standard tile
- 16 RHEINZINK-Building Profile
 - a Eaves flashing
 - b Ridge flashing, double pitch roof/hipped roof
 - c Perforated strip
 - t Ridge flashing, mono pitch roof
- 18 Support Profile
 - a Galvanised steel
- 20 Substructure
 - d Wood, stud with cleat
 - e Softwood boarding, thickness min. 24 mm, width max. 160 mm
 - f OSB/veneer plywood sheathing, thickness min. 22 mm
 - g Softwood boarding, thickness min. 24 mm, width max. 100 mm
- 21 Batten/Squared Timber
- 22 Functional Layer
 - a Underlay covering
- 23 Supporting Structure

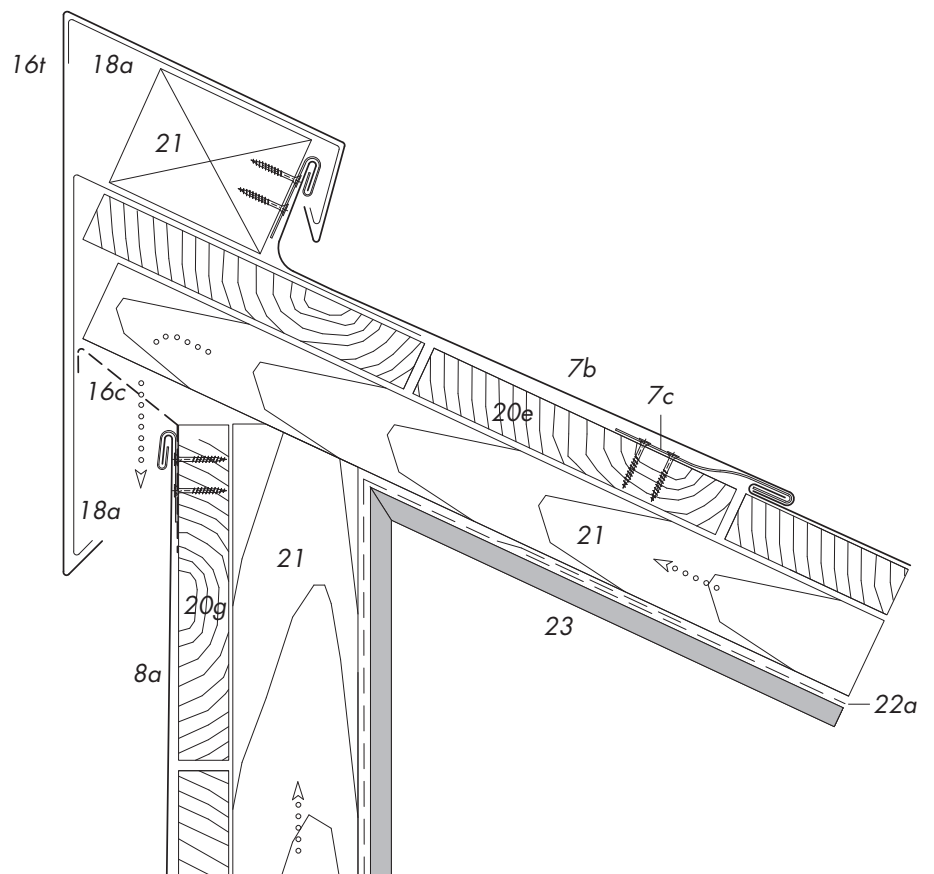


ROOFING APPLICATION DESIGN
PENETRATION DETAIL

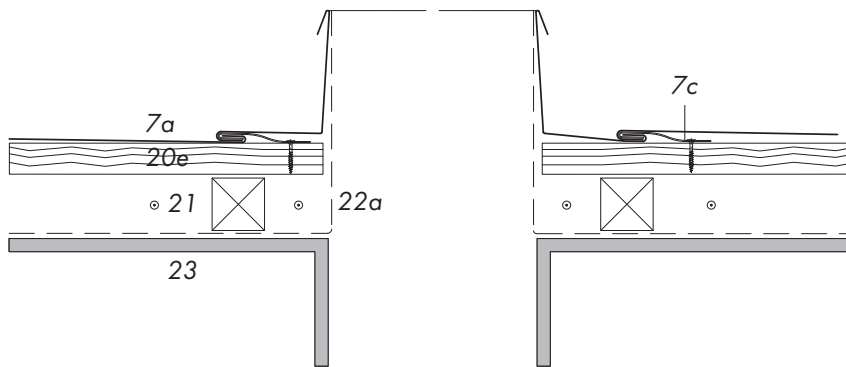

2.13.2 Detail: Penetration

- 7 RHEINZINK-Tile
 - a Standard tile
 - c Short clip/clip rail
- 18 Support Profile
 - c Soldered continuous cleat
- 20 Substructure
 - e Softwood boarding, thickness min. 24 mm, width max. 160 mm
- 21 Batten/Squared Timber
- 22 Functional Layer
 - a Underlay covering
- 23 Supporting Structure



⊙ Air flow in main flow direction
respectively cross ventilation

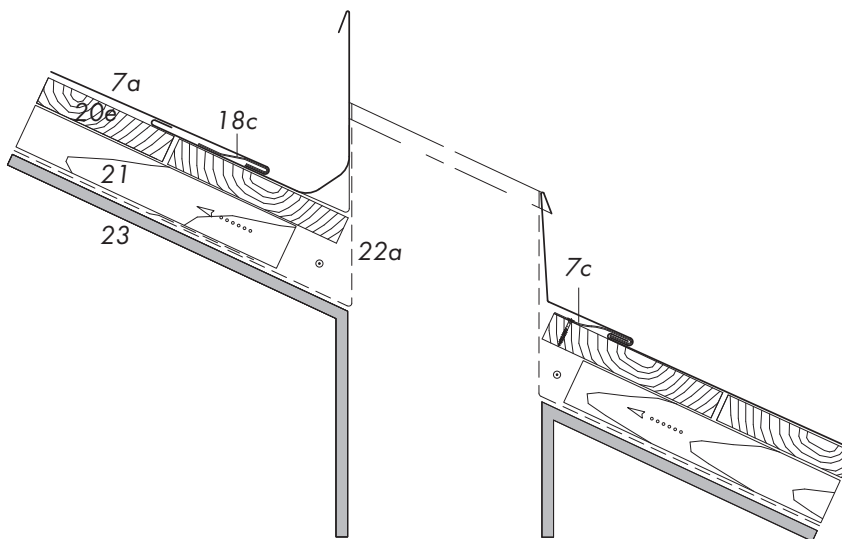


ROOFING APPLICATION DESIGN
EAVES DETAIL

2.13.3 Detail: Eaves


- 1 RHEINZINK-Roof Drainage
 - a Gutter
 - c Gutter bracket, clad
- 7 RHEINZINK-Tile, roof
 - a Standard tile
 - c Short clip/clip rail
- 8 RHEINZINK-Tile, facade
 - a Standard tile
 - c Short clip/clip rail
- 16 RHEINZINK-Building Profile
 - a Eaves flashing
 - c Perforated strip
 - i Termination profile, partially perforated
 - l Cornice coping
 - n Continuous clip
- 17 RHEINZINK-Accessories
 - i Gutter heating
- 18 Support Profile
 - a Galvanised steel
- 20 Substructure
 - e Softwood boarding, thickness min. 24 mm, width max. 160 mm
 - f OSB/veneer plywood sheathing, thickness min. 22 mm
 - g Softwood boarding, thickness min. 24 mm, width max. 100 mm
- 21 Batten/Squared Timber
- 22 Functional Layer
 - a Underlay covering
- 23 Supporting Structure

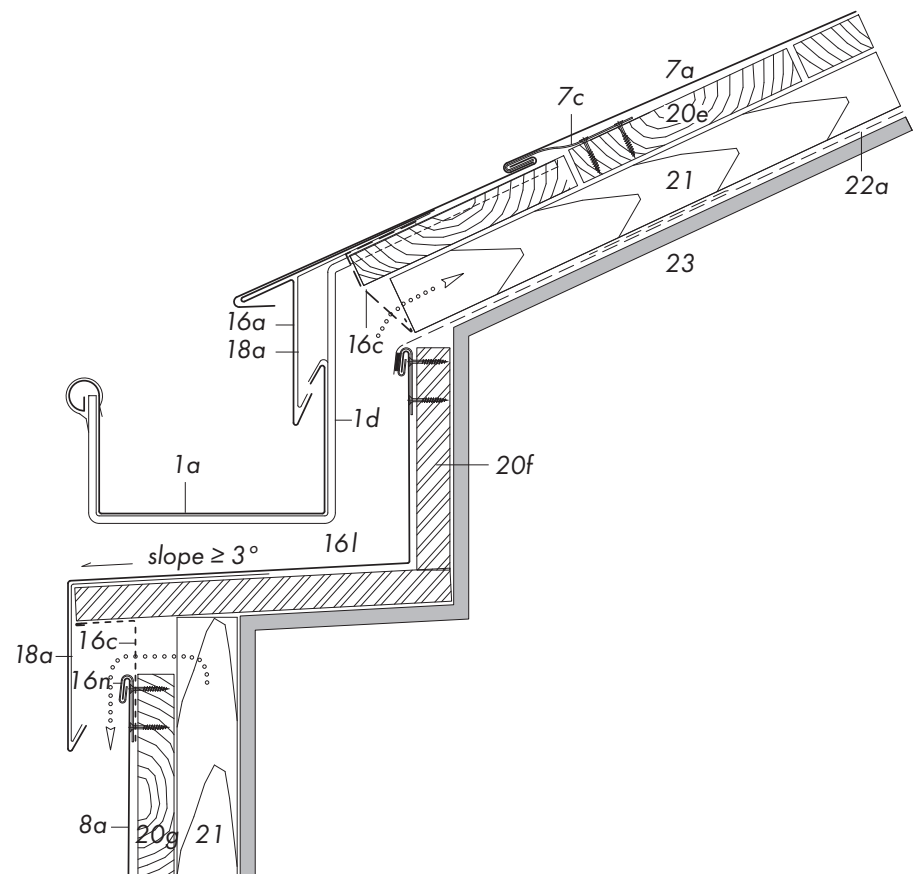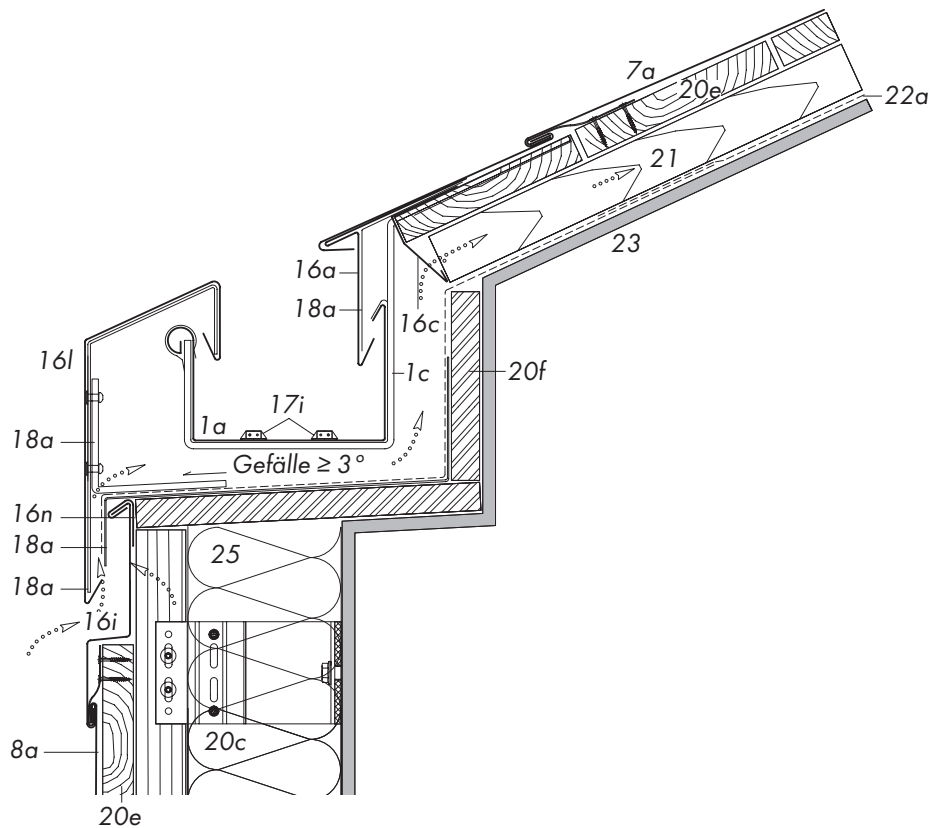

ROOFING APPLICATION DESIGN
VERGE DETAIL

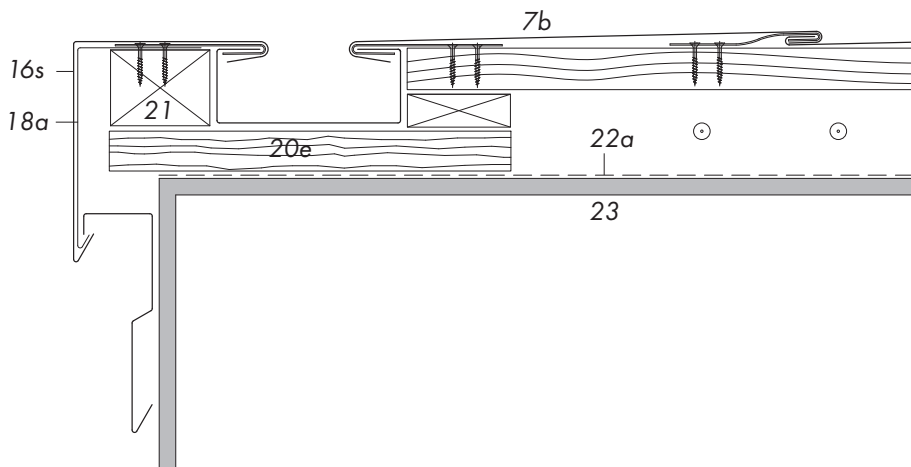


2.13.4 Detail: Verge

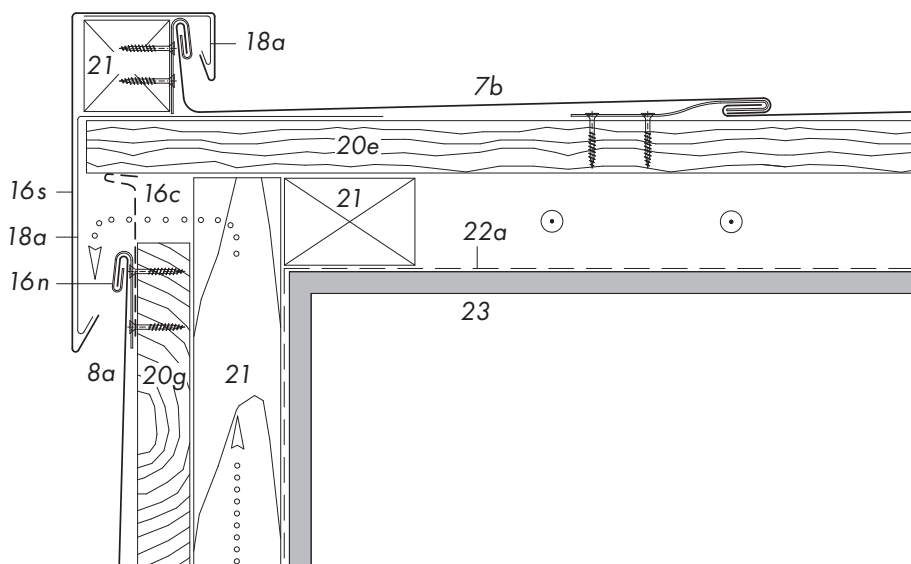

- 7 RHEINZINK-Tile, roof
 - b Fitting tile
 - c Short clip/clip rail
 - 8 RHEINZINK-Tile, facade
 - 16 RHEINZINK-Building Profile
 - c Perforated strip
 - n Continuous clip
 - s Verge flashing, two-part with gutter profile
 - 18 Support Profile
 - a Galvanised steel
 - 20 Substructure
 - e Softwood boarding, thickness min. 24 mm, width max. 160 mm
 - g Softwood boarding, thickness min. 24 mm, width max. 100 mm
 - 21 Batten/Squared Timber
 - 22 Functional Layer
 - a Underlay covering
 - 23 Supporting Structure
- ⊙ Air flow


ROOFING APPLICATION DESIGN
VALLEY DETAIL

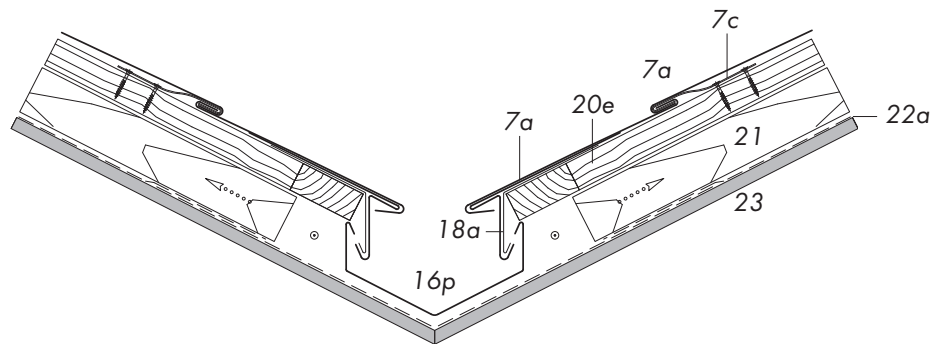


2.13.5 Detail: Valley

- 7 RHEINZINK-Tile, roof
 - a Standard tile
 - c Short clip/clip rail
- 16 RHEINZINK-Building Profile
 - p Valley profile
- 18 Support Profile
 - a Galvanised steel
- 20 Substructure
 - e Softwood boarding, thickness min. 24 mm, width max. 160 mm
- 21 Batten/Squared Timber
- 22 Functional Layer
 - a Underlay covering
- 23 Supporting Structure

⊙ Direction of air flow as cross ventilation

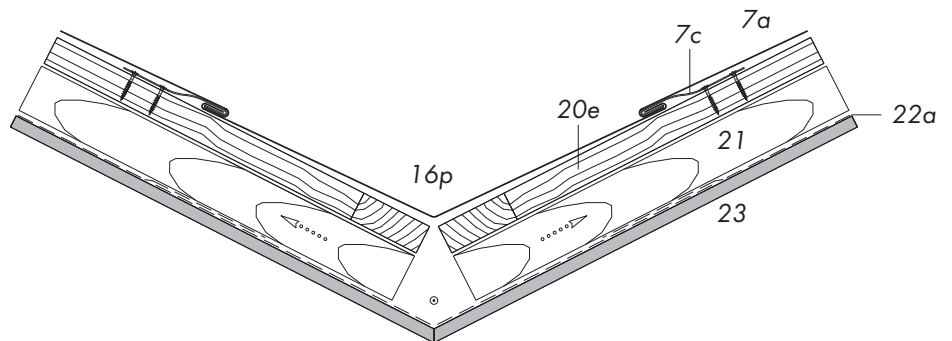


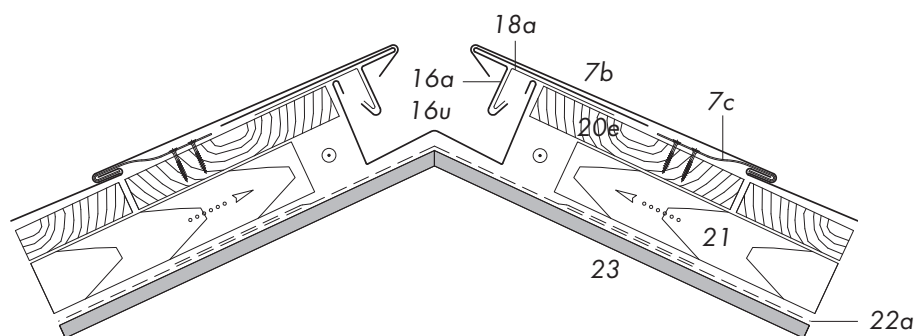

2.13.6 Detail: Hip


- 7 RHEINZINK-Tile, roof
 - a Standard tile
 - b Fitting tile
 - c Short clip/clip rail
- 16 RHEINZINK-Building Profile
 - a Eaves flashing
 - u Hip flashing
- 18 Support Profile
 - a Galvanised steel
- 20 Substructure
 - e Softwood boarding, thickness min. 24 mm, width max. 160 mm
- 21 Batten/Squared Timber
- 22 Functional Layer
 - a Underlay covering
- 23 Supporting Structure

⊙ Direction of air flow as cross ventilation

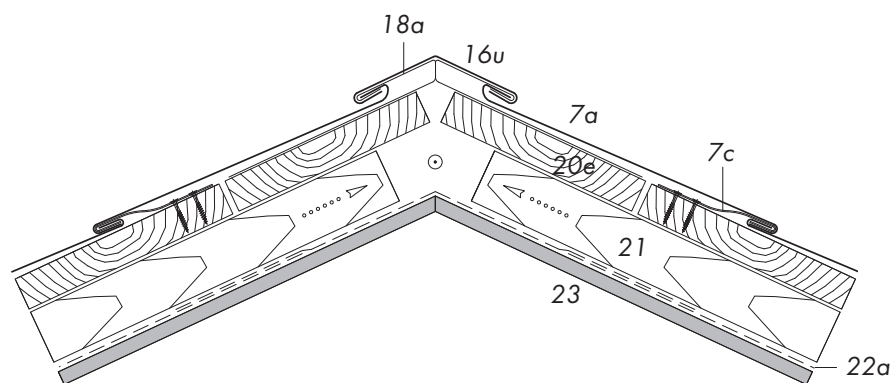

Visit us online – www.rheinzink.com

We have made improvements to our website for you and adapted it to future requirements. Now you can find information about us and our material, RHEINZINK products and services even quicker. Clear structures and fast access take you directly to your destination. Regardless of whether you are interested in innovation, or are looking for references, reports, professional publications or dimension lists and standards. We are of course still available personally for you in future, all over the world.

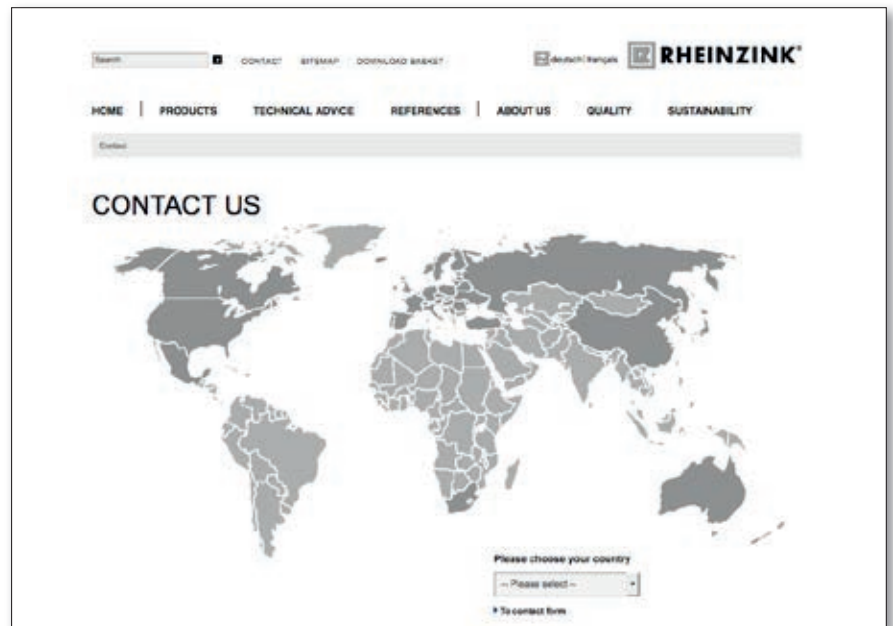

Austria

RHEINZINK AUSTRIA GMBH
info@rheinzink.at

Belgium/Luxembourg

RHEINZINK BELUX S.A./N.V.
info@rheinzink.be

China/Asia-Pacific

RHEINZINK Zinc
Manufacturing
(Shanghai) Co., Ltd.
info@rheinzink.sh.cn

Czech Republic

RHEINZINK ČR s.r.o.
info@rheinzink.cz

Denmark

RHEINZINK Danmark A/S
info@rheinzink.dk

Estonia/Latvia/Lithuania

RHEINZINK Balticum Office
info@rheinzink.lv

France

RHEINZINK FRANCE
contact@rheinzink.fr

Germany

RHEINZINK GmbH & Co. KG
info@rheinzink.de

Hungary

RHEINZINK Hungaria Kft.
info@rheinzink.hu

Italy

RHEINZINK Italia S.R.L.
info@rheinzink.it

Netherlands

RHEINZINK Nederland
Wentzel B.V.
info@rheinzink.nl

Norway

RHEINZINK Norge
info@rheinzink.no

Poland

RHEINZINK Polska Sp. z o.o.
info@rheinzink.pl

Romania

RHEINZINK RO
info@rheinzink.ro

Russia

OOO RHEINZINK
info@rheinzink.ru

Slovak Republic

RHEINZINK SK s.r.o.
info@rheinzink.sk

South Africa/Sub-Saharan Africa

RHEINZINK South Africa
info@rheinzink.co.za

Spain/Portugal

RHEINZINK Ibérica S.L.U.
info@rheinzink.es

Sweden/Finland

RHEINZINK Sverige
info@rheinzink.se

Switzerland

RHEINZINK (Schweiz) AG
info@rheinzink.ch

Turkey/Central Asia & Middle East

RHEINZINK Türkiye
info@rheinzink.com.tr

United Kingdom


RHEINZINK U.K.
info@rheinzink.co.uk

USA/Canada/Mexico

RHEINZINK America, Inc.
info@rheinzink.us

FLAT-LOCK TILES, DESIGN AND APPLICATION

REFERENCE PROJECTS

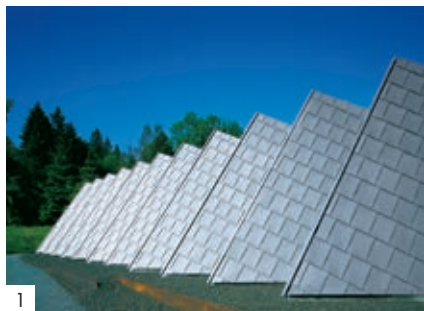







Additional project references
can be found on
the Internet at
www.rheinzink.com



Title:

TRUMPF Sachsen GmbH, Neukirch, Germany

Architect: Barkow + Leibinger Architekten, Berlin, Germany

RHEINZINK-work done by:

Dachdeckerei Bauklempnerei A. Gabriel, Gröbschütz, Germany

1. Hotel Hof Weissbad, Restaurant "Flickflauder", Weissbad, Switzerland

Architects: agps architecture, Zürich, Schweiz

RHEINZINK-work done by: Stephan Sutter, Appenzell, Switzerland, Renato Egli, St. Gallen, Switzerland und Blumer-Lehmann AG, Gossau SG, Switzerland

2. Apartment Building, Linz, Austria

Architect: Projektgruppe Arkade, Linz, Austria

RHEINZINK-work done by: Edtbauer GmbH, Pasching, Austria

3. Factory Building W. Zultner & Co. KG, Graz, Austria

Architect: ARGE Domenig-Eisenköck, Graz, Austria

RHEINZINK-work done by:

Gruber Ges. m.b.H., St. Stefan/Lavanttal, Austria

4. Observation Tower, Haenam Gun, Jeon-Nam Province, Korea

Architect: Mr. Park, Dong-Joon/4-A Architect, Wolsan-Dong,

Nam-Gu, Gwang-Ju City, Korea

RHEINZINK-work done by: Mijie Industrial Co., Ltd., Seoul, Korea

5. Tirolia Spedition GmbH, Ebbs, Austria

Architect: Architekturbüro Wulz-König, Telfs, Austria

RHEINZINK-work done by: Weißbacher Spenglerei, Wörgl, Austria

6. Apartment Building, Coburg, Germany

Architect: Archi Viva, Coburg, Germany

RHEINZINK-work done by: Albert Nemmert, Ahorn, Germany

7. Factory Building Bora, Montegranaro, Italy

Architect: Constantino Grilli, Montegranaro, Italy

RHEINZINK-work done by: Di Leonardo Enio, Capelle sul Tavo, Italy

8. Bishop Challoner Catholic Collegiate School, London, Great Britain

Architect: Perkins Ogden, Alresford Hants, Great Britain

RHEINZINK-work done by:

All Metal Roofing Ltd., Tonbridge, Kent, Great Britain

9. Sir Colin Campbell building, Nottingham University, Great Britain

Architekt: Make, London, Great Britain

RHEINZINK-work done by: Varla UK, Chester, Great Britain

10. O'Phel Golf Club, Yeongcheon, Korea

Architekt: ITAMI JUN + ITM Architects Co., Ltd., Tokyo, Japan/Seoul, Korea

RHEINZINK-work done by: Mijie Industrial Co., Ltd., Seoul, Korea

11. Edinburgh Airport Traffic Control Tower, Edinburgh, Scotland

Architekt: Reid Architecture, London, Great Britain

RHEINZINK-work done by:

Lummel GmbH & Co. KG, Karlstadt/Main, Germany

12. Apartment Building, Linz, Austria

Architekt: Atelier Sturmberger-Moser, Leonding, Austria

RHEINZINK-work done by:

Spenglerei Horst Mayr jun., Leonding, Austria

13. Friendship House, London, Great Britain

Architekt: MacCormac Jamieson & Prichard, London, Great Britain

RHEINZINK-work done by: Boss Metals Ltd., Surrey, Great Britain

14. Haus der Presse, Berlin, Germany

Architekt: Jo. Franzke, Architekten BDA, Frankfurt, Germany

RHEINZINK-work done by:

Lummel GmbH & Co. KG, Karlstadt/Main, Germany

Bernd-R. Bahn GmbH, Berlin, Germany

15. Friendship House, London, Great Britain

Architekt: MacCormac Jamieson & Prichard, London, Great Britain

RHEINZINK-work done by: Boss Metals Ltd., Surrey, Great Britain

16. Tirolia Spedition GmbH, Ebbs, Austria

Architekt: Architekturbüro Wulz-König, Telfs, Austria

RHEINZINK-work done by: Weißbacher Spenglerei, Wörgl, Austria

NOTES



RHEINZINK GmbH & Co. KG
Postfach 1452
45705 Datteln
Germany

Tel.: +49 2363 605-0
Fax: +49 2363 605-209

info@rheinzink.de
www.rheinzink.com